



ELIMINATE RUST STAINING, AS WELL AS SULFUR “ROTTEN EGG” ODORS WITH THE NELSEN AIO™ AIR INJECTION OXIDIZING SYSTEMS.

Iron and Sulfur are two of the most common elements found in nature. While both are extremely important for every day life, both are a nuisance in water and can cost you money and frustration.

Iron staining is a common problem in homes today. It causes orange staining on fixtures, as well as dingy clothes and sometimes can have negative effects on both hair and skin. Sulfur is easily detected by the presence of a “rotten egg” odor, and is sometimes associated with yellow staining.

All of these problems can be eliminated with the Nelsen AIO™ Air Injection Oxidizing Filtration System.

Nelsen AIO®
AIR INJECTION OXIDIZING FILTER SYSTEM
FOR IRON AND SULFUR REMOVAL



AIR INJECTION OXIDIZING SYSTEM



Benefits of a Nelsen Water Treatment System



REDUCED IRON STAINING:

Iron staining is a common problem in homes today. It causes orange staining on fixtures, as well as dingy clothes and sometimes can have negative effects on both hair and skin.




REDUCED SULFUR SMELL:

Sulfur is easily detected by the presence of a “rotten egg” odor and is sometimes associated with yellow staining.



PROTECT YOUR APPLIANCES:

By reducing the iron and sulfur buildup in your water your appliances will last longer. Rust and slime buildup make your appliances work harder and less efficiently, requiring more maintenance or replacement.

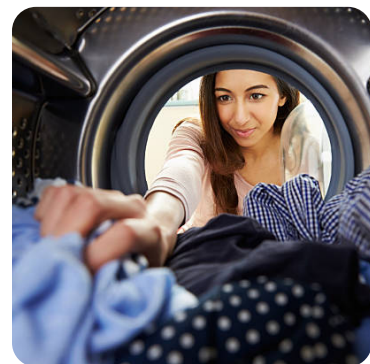

EFFICIENT AND CHEMICAL FREE:

The need for additional equipment such as air tanks, feed pumps or harsh chemicals (like those used in Manganese Greensand Systems) is virtually eliminated!

2510/5600 SXT SERIES

USING NATURE'S OWN PROCESS

These naturally occurring elements can be removed using nature's own process of oxidation. The Nelsen AIO™ maintains an "air pocket" in the top of the tank while the system is in service. As water passes through the air pocket, iron and sulfur are oxidized. The Nelsen AIO™ filter media bed then removes the oxidized iron and sulfur from the water. Additionally, dissolved oxygen is added to the water.

PROVEN TECHNOLOGY

The Nelsen AIO™ system includes the Pentair Fleck 2510AIO SXT or 5600AIO SXT electronic control valve that automatically backwashes the system to clean the media and flush everything down the drain. The Nelsen AIO™ puts the whole oxidation process inside one tank, keeping maintenance costs and down time to a minimum.

Made by Pentair Fleck, a leading manufacturer of control valves in the US, the digital control valve allows for ease of setup and automatic operation.

The Nelsen AIO™ can remove up to 8 ppm Hydrogen Sulfide and up to 7 ppm Iron. A daily backwash will remove accumulated iron and replenish the filter media bed. The regeneration process also adds a fresh air pocket to the system. Calcium and hardness can also be removed when a water softener is placed after the Nelsen AIO™.

AIO System featuring the Pentair Fleck 5600AIO SXT Control Valve Shown with Optional Tank Jacket



Nelsen Corporation is the largest family-owned manufacturer/distributor of water treatment products in the United States. Headquartered in Akron, Ohio with additional distribution centers in Arizona, Texas and Florida, our company has seen substantial growth over the years. Since 1954 Nelsen Corporation has remained committed to the professional water treatment dealer, their customers and the communities that they serve. More than 65 years of experience in water treatment have been incorporated into our systems yielding the very best equipment for your family or your business.



FLECK
Pentair Water

AIO System featuring the Pentair Fleck 2510AIO SXT Control Valve Shown with Optional Tank Jacket





	5600AIO SXT	2510AIO SXT
Inlet/Outlet Fittings	3/4", 1"	3/4", 1"
Cycles	3	4
Valve Material	Fiber-reinforced polymer	Fiber-reinforced polymer
Service Flow Rates	2.5 - 6.3 GPM	2.5 - 10.0 GPM
Operating Pressures	20-75 PSI	20-75 PSI
Operating Temperatures	34-110 Degrees	34-110 Degrees
Electrical Specification	24V - 50/60 Hz	24V - 50/60 Hz

Professional Series AIO Control Valve

- Water use is monitored for peak efficiency
- Built in backup of settings during power outages
- Simple diagnostics and design provide for easy maintenance

Oxidation Air Pocket

- An air pocket is introduced into the top of the filter tank
- As water passes through this pocket the iron and sulfur in the water are oxidized

Exclusive Filter Media Bed

- Custom blends of media for efficient reduction of iron, sulfur and manganese

Basket Style Distribution System

- Delivers evenly distributed and high quality flows

Arrows indicate water flow through the system as it oxidizes and filters.

Ready to get rid of iron and sulfur from your water? Contact:

SYSTEM FEATURES & OPTIONS

5600AIO SXT Key Features

- Large LCD display with 48 hours of internal power backup capacitor
- LCD display alternates between time of day, volume remaining or days to regeneration
- Down-flow regeneration
- Backwash capacity handles tanks up to 13" for filter applications

2510AIO SXT Key Features

- Top mount control with adjustable cycles delivers controlled up-flow backwash, air draw, rapid rinse, and down-flow service
- Time-tested hydraulically balanced piston, seal and spacer concept to control service flow and regeneration
- Non-corrosive, high-tech material construction
- Excellent flow rates - 2.5 GPM continuous, 10.0 GPM peak
- Backwash capacity handles tanks up to 14" diameter

System Options

- Corrosion free fiber-reinforced polymer or stainless steel bypass valve
- Auxiliary switches
- Optional stylish tank jackets help reduce tank condensation

Optional Enpress® Vortech™ Plate Tank style distribution system, provides increased backwash efficiency using less water and saving money

