



TECHNICAL DATASHEET

AquaSorb® CS

Granular coconut shell based activated carbon

AquaSorb® CS is a medium activity granular activated carbon manufactured from a sustainable raw material source. Its enhanced microporosity makes it particularly well suited for the removal of low molecular weight organic compounds and their chlorinated by-products such as chloroform and other trihalomethanes (THM's). It is also ideally suited for the removal of oxidizing agents such as chlorine and ozone from process water. An important feature of this material is its superior mechanical hardness and the extensive dedusting during its manufacture that ensures an exceptionally clean activated carbon product.



SPECIFICATION*

Iodine number	min. 1000 mg/g
Moisture content, (as packed)	max. 5%
CTC adsorption	min. 50%
Total ash content	max. 4%
Hardness	min. 98%
Apparent density	min. 460 kg/m ³

TYPICAL PROPERTIES*

Surface area	1050 m ² /g
Dechlorination half length value (12x40 mesh)	1.8 cm
Apparent density	520 kg/m ³
Backwashed and drained density	440 kg/m ³

PARTICLE SIZE (mesh)	20x50	12x40	10x20	8x30	8x16
Oversize	<5%	<5%	<5%	<5%	<5%
Undersize	<4%	<4%	<4%	<4%	<4%
Effective size	0.4 mm	0.6 mm	1.0 mm	1.0 mm	1.2 mm
Mean particle diameter	0.5 mm	1.0 mm	1.4 mm	1.4 mm	1.9 mm
Uniformity co-efficient	<1.6	<1.7	<1.7	<1.6	<1.4

THE INFORMATION SUPPLIED ABOVE IS BASED ON ANALYSIS OF PRODUCTION TREND OVER THE PREVIOUS SIX-MONTHS AND IS SUBJECT TO CHANGE WITHOUT NOTICE SHOULD FUTURE TRENDS BE ADJUSTED.

Features and Benefits

- Highly microporous structure
- Maximum hardness
- Excellent adsorption capacity
- High volume activity
- Rapid dechlorination
- Effective removal of ozone
- Low filtered water turbidity

Typical Applications

- Municipal drinking water treatment
- Residential water treatment systems
- Beverage production
- Protection of ion exchange resins from chlorine and organic fouling

Available Particle Sizes

- 20x50 mesh (0.85 - 0.30mm)
- 12x40 mesh (1.70 - 0.425mm)
- 10x20 mesh (2.00 - 0.85mm)
- 8x30 mesh (2.36 - 0.60mm)
- 8x16 mesh (2.36 - 1.18 mm)
- other granulations available upon request

Certifications and Approvals

- NSF / ANSI Standard 61
- AWWA B604-96
- EN12915
- Halal certified
- Kosher certified

Standard Packaging

- 25 kg bag (55 lb)
- 500 kg bulk bag (1100 lb)




* SPECIFICATIONS AND TYPICAL PROPERTIES ARE PRODUCED USING JACOBI CARBONS' TEST METHODS. THEY ARE LISTED FOR INFORMATION PURPOSES ONLY AND NOT TO BE USED AS PURCHASE SPECIFICATIONS. SALES SPECIFICATIONS CAN BE OBTAINED FROM YOUR JACOBI CARBONS TECHNICAL SALES REPRESENTATIVE AND SHOULD BE REVIEWED BEFORE PLACING AN ORDER.

Visit: www.jacobi.net




AquaSorb® CS 8x30 mesh

BED EXPANSION DURING BACKWASH

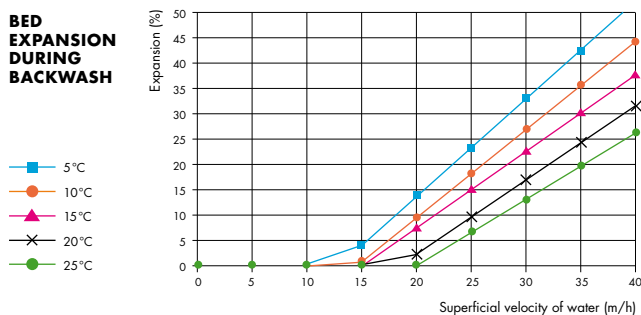


DOWNFLOW PRESSURE LOSS

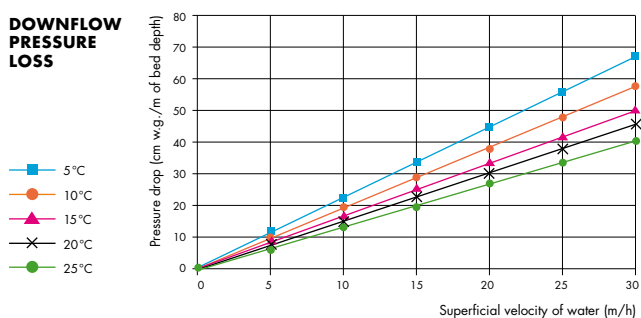


AquaSorb® CS 10x20 mesh

BED EXPANSION DURING BACKWASH

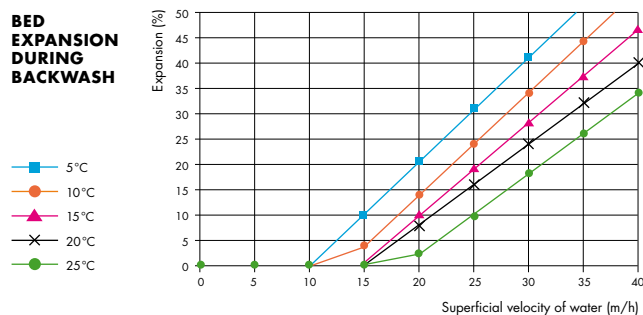


DOWNFLOW PRESSURE LOSS

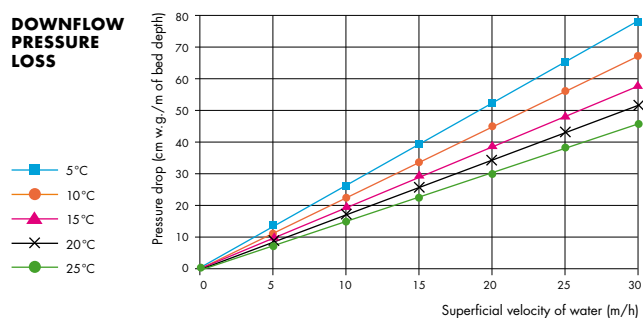


AquaSorb® CS 12x40 mesh

BED EXPANSION DURING BACKWASH

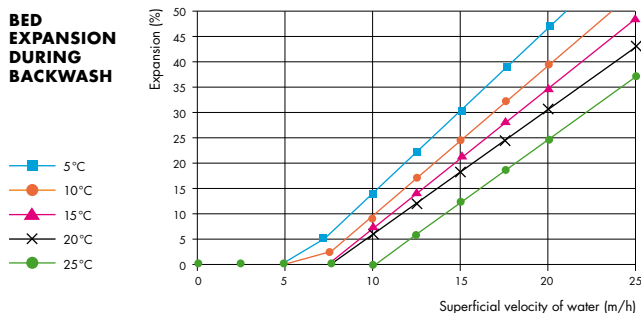

DOWNFLOW PRESSURE LOSS

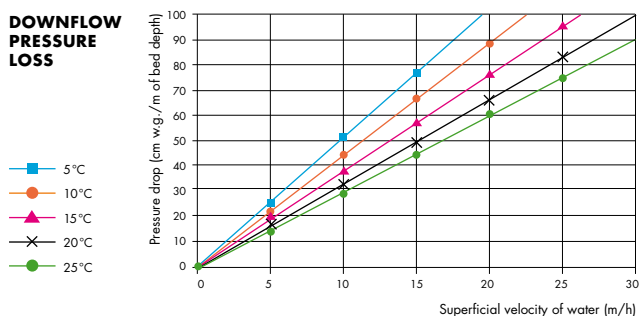

PRODUCTION CAPABILITY

The Jacobi Carbons Group of companies owns and operates manufacturing facilities in nine countries around the world. We produce in excess of 70,000 metric tonnes of high quality activated carbons based on coconut shell, coal and wood, by both chemical and steam (physical) activation methods. Our facilities are state-of-the-art, and are the most modern production units of their type. Intensive investment in these has ensured that products are manufactured to the most exacting quality standards demanded by our customers.

TECHNICAL SUPPORT AND KNOW-HOW

One of the distinguishing features of Jacobi Carbons is the extremely high level of technical competence within the company. Stand-alone product and technical service departments are staffed by industry-leading specialists in the field of activated carbon application and research. Dedicated laboratory facilities in Europe and North America work with our clients to ensure the optimum result is achieved from the use of our activated carbon products.

BED EXPANSION AND PRESSURE LOSS CURVES ARE PROVIDED FOR THE MOST COMMONLY USED PARTICLE SIZES. CHARTS ARE AVAILABLE FOR ALL PARTICLE SIZES ON REQUEST.

For more information or to contact Jacobi visit: www.jacobi.net



NOTICE Due to the progressive nature of the Jacobi Carbons Group and the continually improving designs and performance of our products, we reserve the right to change product specifications without prior notification. The information contained in this datasheet is intended to assist a customer in the evaluation and selection of products supplied by Jacobi Carbons. The customer is responsible for determining whether products and the information contained in this document are appropriate for customer's use. Jacobi Carbons assumes no obligation or liability for the use of the information in this datasheet, no guarantees or warranties, expressed or implied, are provided. Jacobi Carbons disclaims responsibility and the user must accept full responsibility for performance of systems based on this data.

© Copyright 2012 Jacobi, Jacobi Carbons, PICA and the Jacobi and PICA logos are registered trademarks and AquaSorb, EcoSorb, ColorSorb, DioxSorb, AddSorb, ReSorb, PICA-TF, PICA-PURE, PICA-TOX, PICA-CARB, PICA-GOLD, PICA-RESP, PICA-HYDRO and PICA-CLEAN are trademarks of Jacobi Carbons, all of which may or may not be used in certain jurisdictions.

JACOBI-TDS-AQUASORB-CS-A4-ENG-D1113

Jacobi Corporate Headquarters
Slejdaregatan 1
SE-39353 Kalmar | Sweden
Tel: +46 480 417550 | Fax: +46 480 417559
info@jacobi.net | www.jacobi.net

