

METER SOFTENER

MODEL NO. NCSMF-WS2H-450-C3948

CAPACITY:

MIN. 360,000 grs. @ 10 lbs./cu.ft.
 MAX. 450,000 grs. @ 15 lbs./cu.ft.

FLOW RATE:

NORMAL 88 gpm.
 PEAK 113 gpm.
 BACKWASH 25 gpm.

TANK SIZE: 30" x 72"

COMPOSITE

MEDIA:

RESIN 15 cu.ft.
 GRAVEL 350 lbs.

PIPE SIZE:

INLET 2"
 OUTLET 2"
 DRAIN 1"
 BRINE 1/2"
 METER 2"

BRINE TANK

MODEL NO. BT3948R-454HF-5

TANK SIZE: 39" x 48"

POLYETHYLENE

CAPACITY:

250 gals.
 2,200 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 1,515 lbs.


NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

73"L x 39"W x 96"H

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

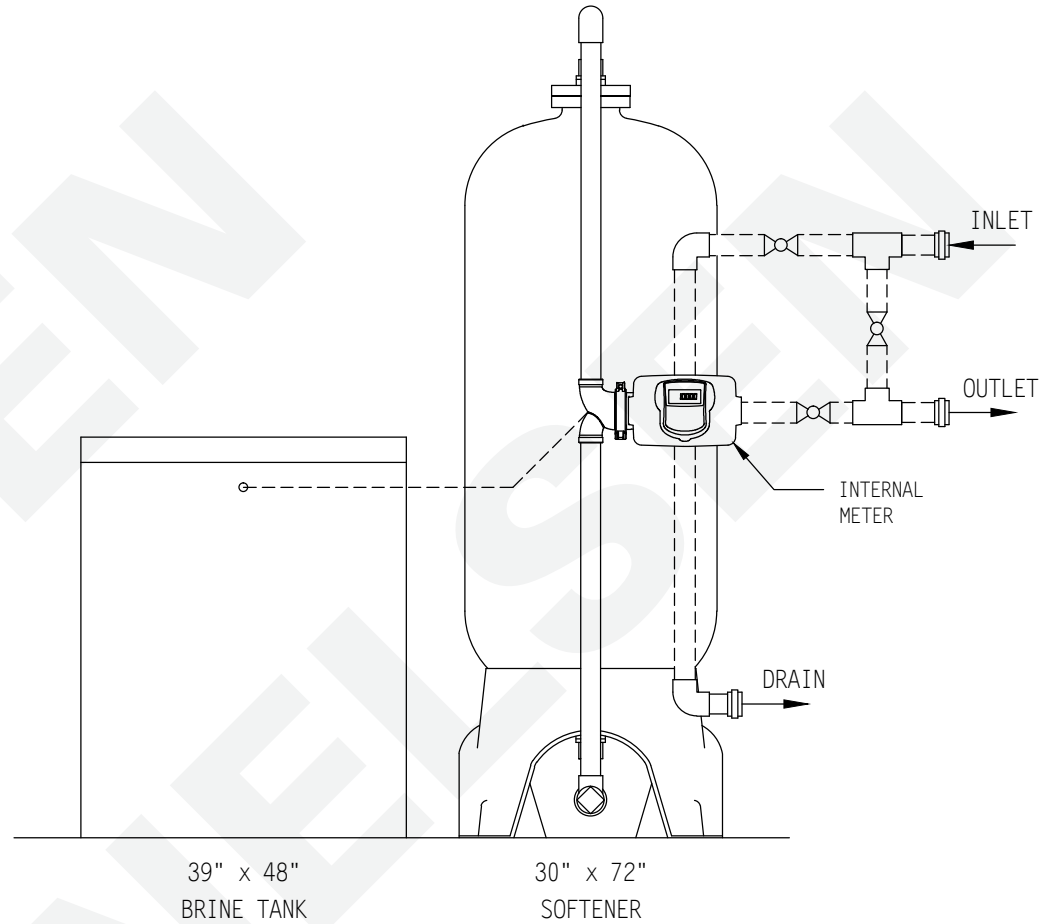

39" x 48"
BRINE TANK

30" x 72"
SOFTENER

NELSEN
CORPORATION

NELSEN CORPORATION
 OHIO • ARIZONA • TEXAS • FLORIDA
 3250 BARBER RD - NORTON, OH 44203
 800-362-9686
 NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.
 SOFTENER 450K COMPOSITE TANK
 SIMPLEX METER SYSTEM

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 NELSEN CORPORATION.

DRAWN BY:	RAR
DATE:	04-04-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.	NCSMF-WS2H-450-C3948
----------	----------------------