

DUPLEX METER SOFTENER

MODEL NO. NCSMF-WS2HF-DUP-210-C2450

CAPACITY: (each tank)

MIN. 168,000 grs. @ 10 lbs./cu. ft.

MAX. 210,000 grs. @ 15 lbs./cu. ft.

FLOW RATE: (each tank)

NORMAL 66 gpm.

PEAK 85 gpm.

BACKWASH 12 gpm.

TANK SIZE: 21" x 62"

COMPOSITE

MEDIA: (each tank)

RESIN 7 cu. ft.

GRAVEL 150 lbs.

PIPE SIZE:

INLET 2"

OUTLET 2"

DRAIN 1"

BRINE 1/2"

METER 2"

BRINE TANK

MODEL NO. BT2450R-454HF-5

TANK SIZE: 24"x 50"

POLYETHYLENE

CAPACITY:

100 gal.s.

900 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 1,395 lbs.

24" x 50"
BRINE TANK

UNIT A

UNIT B

21" x 62"
SOFTENER

NOTE:

ALL DASHED PIPE, VALVES,
AND FITTINGS NOT PROVIDED
BY NELSEN CORPORATION.


SPACE REQUIRED (APPROX)

74"L x 24"W x 85"H

PEAK FLOWS ARE NOT
RECOMMENDED FOR EXTENDED
PERIODS OF TIME.

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND
CANNOT BE REPRODUCED OR USED TO
MANUFACTURE ANYTHING SHOWN OR REFERRED
TO WITHOUT DIRECT WRITTEN PERMISSION FROM
NELSEN CORPORATION.

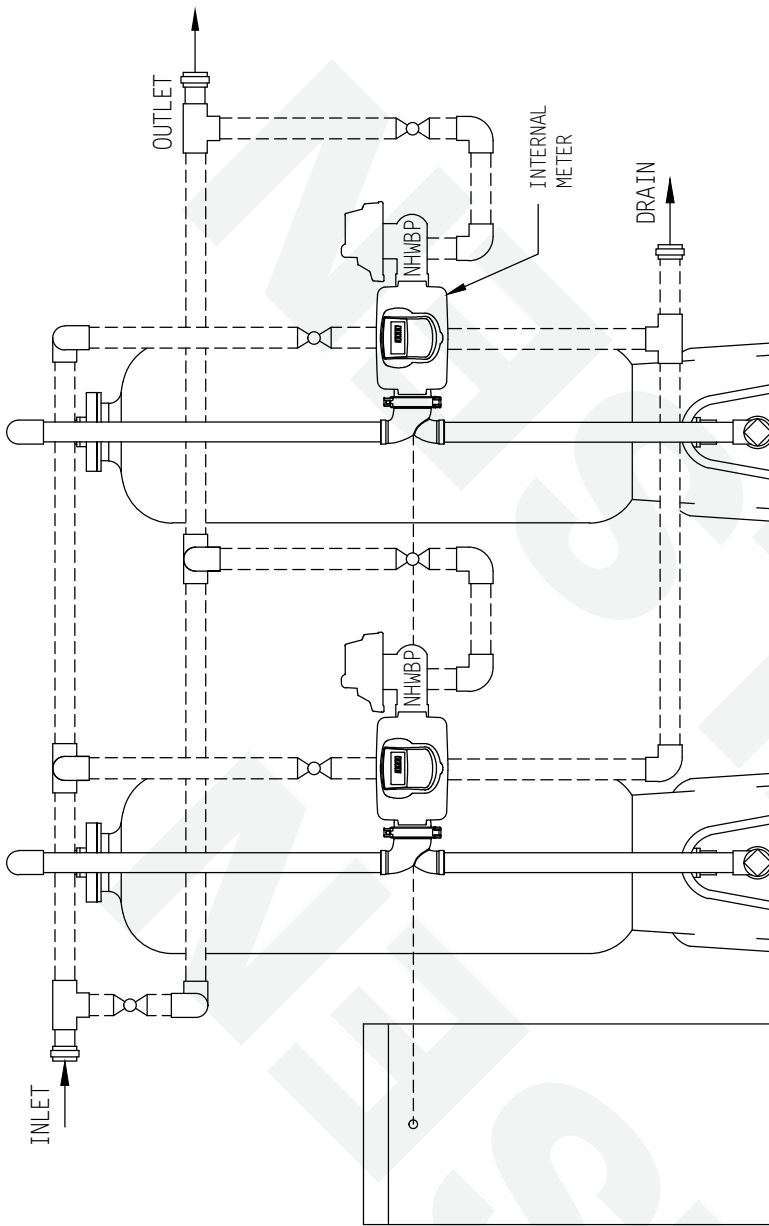

NELSEN CORPORATION
OHIO • ARIZONA • TEXAS • FLORIDA
3250 BARBER RD. - NORTON, OH 44203
800-362-9886
NELSEN.CORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.
SOFTENER 210K COMPOSITE TANK
DUPLEX METER SYSTEM

DRAWN BY:	RAR	DWG. NO.	NCSMF-WS2HF-DUP-210-C2450
DATE:	04-04-17		
CHECKED BY:			
PAGE 1 OF 1	REV:		