

DUPLEX METER SOFTENER

MODEL NO. NCSMF-WS2HF-DUP-450-C3948

CAPACITY: (each tank)

MIN. 360,000 grs. @ 10 lbs./cu. ft.

MAX. 450,000 grs. @ 15 lbs./cu. ft.

FLOW RATE: (each tank)

NORMAL 88 gpm.

PEAK 113 gpm.

BACKWASH 25 gpm.

TANK SIZE: 30" x 72"

COMPOSITE

MEDIA: (each tank)

RESIN 15 cu. ft.

GRAVEL 350 lbs.

PIPE SIZE:

INLET 2"

OUTLET 2"

DRAIN 1"

BRINE 1/2"

METER 2"

BRINE TANK

MODEL NO. BT3948R-454HF-5

TANK SIZE: 39" x 48"

POLYETHYLENE

CAPACITY:

250 gals.


2,200 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 2,950 lbs.

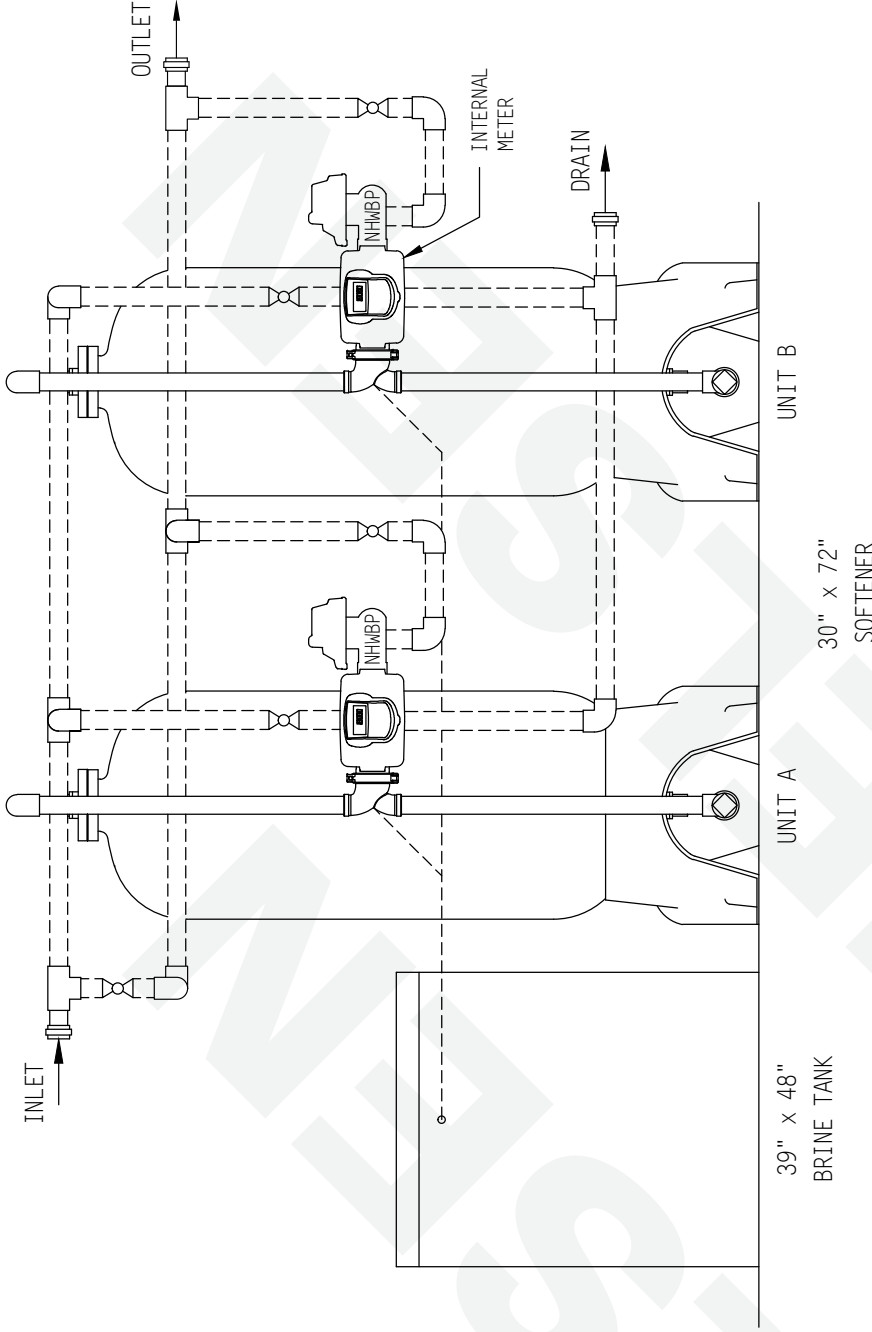

NOTE:

ALL DASHED PIPE, VALVES, AND FITTINGS NOT PROVIDED BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

107"L x 39"W x 96"H

PEAK FLOWS ARE NOT

RECOMMENDED FOR EXTENDED

PERIODS OF TIME.

NELSEN
CORPORATION
NELSEN CORP. OHIO • ARIZONA • TEXAS • FLORIDA
3250 BARBER RD. - NORTON, OH 44203
800-362-9686
NELSEN CORP. COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.
SOFTENER 450K COMPOSITE TANK
DUPLEX METER SYSTEM

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

DRAWN BY:	RAR	DWG. NO.	NCSMF-WS2HF-DUP-450-C3948
DATE:	04-05-17		
CHECKED BY:			
PAGE 1 OF 1	REV:		