

SOFTENER

MODEL NO. MT285/17M-150

CAPACITY:

MIN. 120,000 grs. @ 10 lbs./cu. ft.
 MAX. 150,000 grs. @ 15 lbs./cu. ft.

FLOW RATE:

NORMAL 25 gpm
 PEAK 53 gpm
 BACKWASH 10 gpm

TANK SIZE: 18" x 65"

COMPOSITE

MEDIA:

RESIN 5 cu. ft.
 GRAVEL 100 lbs.

PIPE SIZE:

INLET 1-1/2"
 OUTLET 1-1/2"
 DRAIN 1"
 BRINE 1/2"
 METER 1-1/2"

BRINE TANK

MODEL NO. BT2450R-454HF-5
 TANK SIZE: 24" x 50"

POLYETHYLENE

CAPACITY:
 100 gal's.
 900 lbs./salt
 BRINE VALVE: 454HF
 BRINE WELL: 5"


WEIGHT (APPROX)

TOTAL SHIPPING 558 lbs.
 TOTAL OPERATING 1,545 lbs.
 SPACE REQUIRED (APPROX)
 46" L x 24" W x 78" H

NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY NELSEN CORPORATION.

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

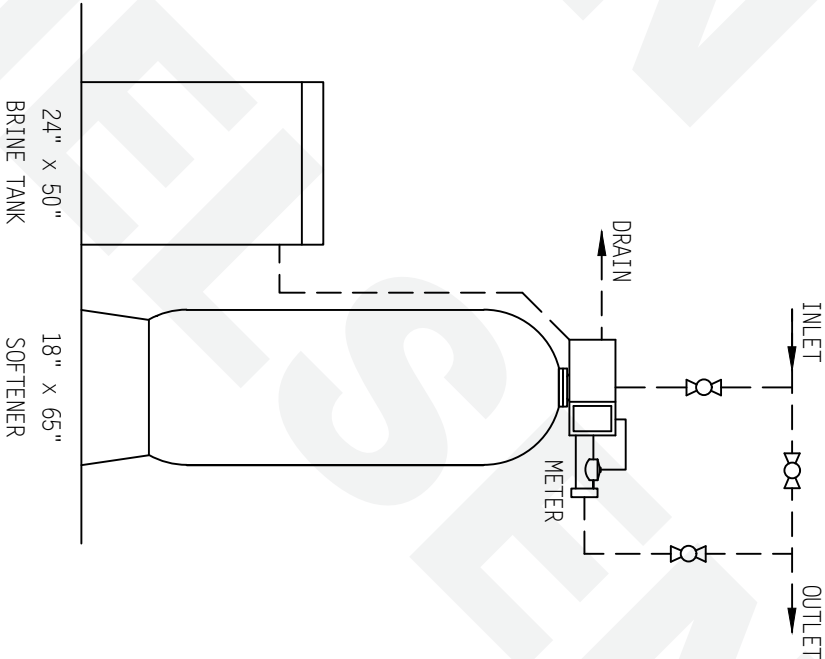

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 NELSEN CORPORATION.

NELSEN CORPORATION
 OHIO • ARIZONA • TEXAS • FLORIDA

GENERAL ARRANGEMENT DWG.
 SOFTENER 150K
 SYSTEM 4-METER

DRAWN BY:	R. ROBESON	DWG. NO.	285/17M-150-C2450
DATE:	07-11-07		
CHECKED BY:			
PAGE 1 OF 1	REV: 06-01-12		