

SOFTENER

MODEL NO. MT285/17M-210

CAPACITY:

MIN. 168,000 grs. @ 10 lbs./cu. ft.
 MAX. 210,000 grs. @ 15 lbs./cu. ft.

FLOW RATE:

NORMAL 35 gpm.
 PEAK 60 gpm.
 BACKWASH 12 gpm.

TANK SIZE: 21" x 62"

COMPOSITE

MEDIA:

RESIN 7 cu. ft.
 GRAVEL 150 lbs.

PIPE SIZE:

INLET 1-1/2"
 OUTLET 1-1/2"
 DRAIN 1"
 BRINE 1/2"
 METER 1-1/2"

BRINE TANK

MODEL NO. BT2450R-454HF-5
 TANK SIZE: 24" x 50"

POLYETHYLENE

CAPACITY:
 100 gal's.
 900 lbs./salt
 BRINE VALVE: 454HF
 BRINE WELL: 5"


WEIGHT (APPROX)

TOTAL SHIPPING 725 lbs.
 TOTAL OPERATING 1,840 lbs.
 SPACE REQUIRED (APPROX)
 49" L x 24" W x 74" H

NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY NELSEN CORPORATION.

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

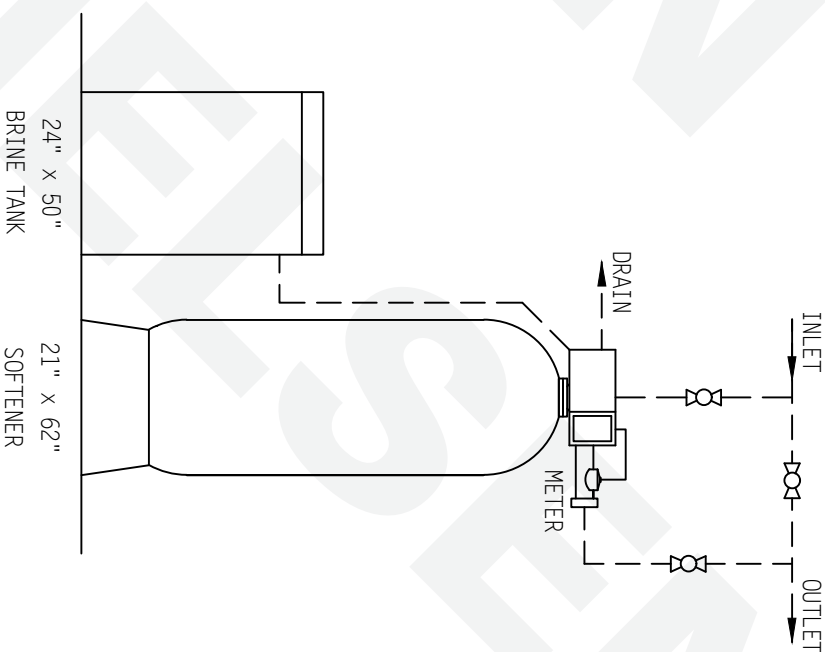

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 NELSEN CORPORATION.

NELSEN
 CORPORATION
 OHIO • ARIZONA • TEXAS • FLORIDA

NELSEN CORPORATION
 3250 BARBER RD - NORTON, OH 44203
 800-362-9686

GENERAL ARRANGEMENT DWG.
 SOFTENER 210K
 SYSTEM 4-METER

DRAWN BY:	R. ROBESON	DWG. NO.	285/17M-210-C2450
DATE:	07-11-07		
CHECKED BY:			
PAGE 1 OF 1	REV: 06-01-12		