

## SOFTENER

MODEL NO. MT285/17M-300

### CAPACITY:

MIN. 240,000 grs. @ 10 lbs./cu. ft.  
 MAX. 300,000 grs. @ 15 lbs./cu. ft.

### FLOW RATE:

NORMAL 40 gpm.  
 PEAK 66 gpm.  
 BACKWASH 15 gpm.

TANK SIZE: 24" x 72"

### COMPOSITE

### MEDIA:

RESIN 10 cu. ft.  
 GRAVEL 250 lbs.

### PIPE SIZE:

INLET 1-1/2"  
 OUTLET 1-1/2"  
 DRAIN 1"  
 BRINE 1/2"  
 METER 1-1/2"

### BRINE TANK

MODEL NO. BT3048R-454HF-5

SPACE REQUIRED: (APPROX)  
 58" L x 30" W x 81" H

TANK SIZE: 30" x 48"

### POLYETHYLENE

### CAPACITY:


145 gal's.  
 1200 lbs./salt  
 BRINE VALVE: 454HF  
 BRINE WELL: 5"

NOTE:  
 ALL DASHED PIPE, VALVES,  
 AND FITTINGS NOT PROVIDED  
 BY NELSEN CORPORATION.

PEAK FLOWS ARE NOT  
 RECOMMENDED FOR EXTENDED  
 PERIODS OF TIME.

### WEIGHT (APPROX)

TOTAL SHIPPING 1,054 lbs.  
 TOTAL OPERATING 2,560 lbs.

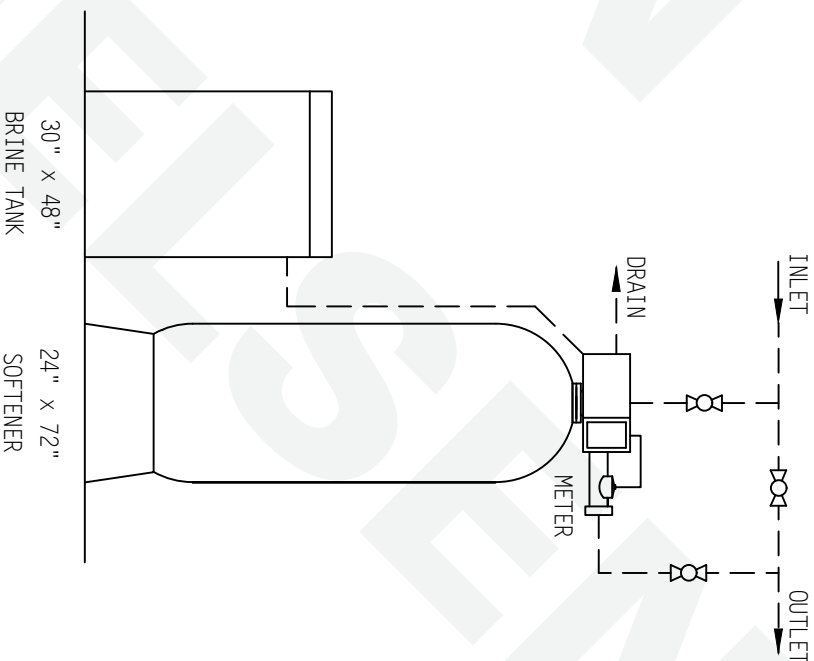

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
 CANNOT BE REPRODUCED OR USED TO  
 MANUFACTURE ANYTHING SHOWN OR REFERRED  
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
 NELSEN CORPORATION.

**NELSEN**  
 CORPORATION

NELSEN CORPORATION  
 3250 BARBER RD - NORTON, OH 44203  
 800-362-9686  
 OHIO • ARIZONA • TEXAS • FLORIDA

GENERAL ARRANGEMENT DWG.

SOFTENER 300K  
 SYSTEM 4-METER

DRAWN BY:	R. ROBESON
DATE:	08-22-08
CHECKED BY:	
PAGE 1 OF 1	REV: 06-04-12

DWG. NO.  
 285/17M-300-C3048