

SOFTENER

MODEL NO. MT285/17M-450

CAPACITY:

MIN. 360,000 grs. @ 10 lbs./cu. ft.
 MAX. 450,000 grs. @ 15 lbs./cu. ft.

FLOW RATE:

NORMAL 45 gpm.
 PEAK 66 gpm.
 BACKWASH 25 gpm.

TANK SIZE: 30" x 72"

COMPOSITE

MEDIA:

RESIN 15 cu. ft.
 GRAVEL 350 lbs.

PIPE SIZE:

INLET 1-1/2"
 OUTLET 1-1/2"
 DRAIN 1"
 BRINE 1/2"
 METER 1-1/2"

BRINE TANK

MODEL NO. BT3948R-454HF-5

TANK SIZE: 39" x 48"

POLYETHYLENE

CAPACITY:

250 gal's.
 2200 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"


NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY NELSEN CORPORATION.

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

WEIGHT (APPROX)

TOTAL SHIPPING 1,523 lbs.
 TOTAL OPERATING 4,140 lbs.

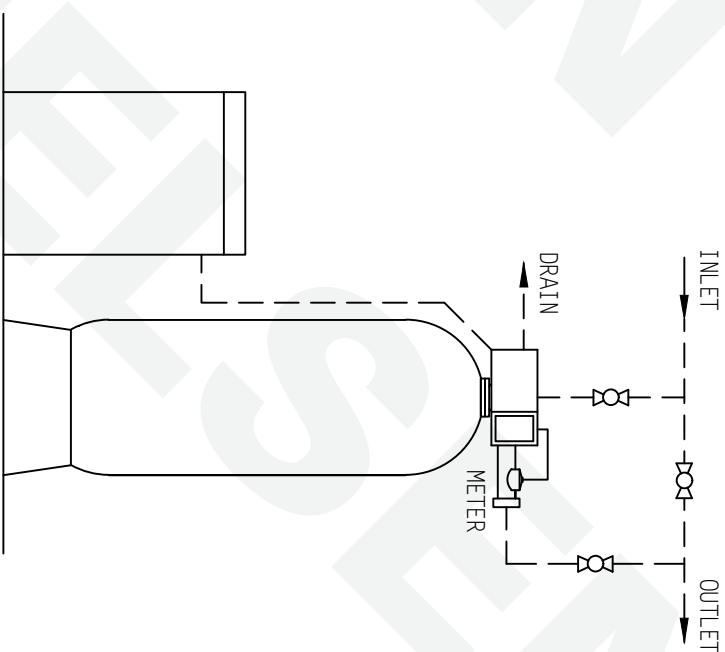

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 NELSEN CORPORATION.

NELSEN CORPORATION
 OHIO • ARIZONA • TEXAS • FLORIDA

GENERAL ARRANGEMENT DWG.

SOFTENER 450K
 SYSTEM 4-METER

DRAWN BY:	R. ROBESON	DWG. NO.	285/17M-450-C3948
DATE:	07-11-07		
CHECKED BY:			
PAGE 1 OF 1	REV: 06-04-12		