

# QUADPLEX NXT2 SOFTENER

MODEL NO. 29/17NXT2-QUAD-120-C2441

CAPACITY: (each tank)

MIN. 96,000 grs. @ 10 lbs./cu.ft.

MAX. 120,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)

NORMAL 40 gpm.

PEAK 57 gpm.

BACKWASH 7 gpm.

TANK SIZE: 16" x 65"

COMPOSITE

MEDIA: (each tank)

RESIN 4 cu.ft.

GRAVEL 75 lbs.

PIPE SIZE:


INLET 2"

OUTLET 2"

DRAIN 1"

BRINE 1/2"

METER 2"

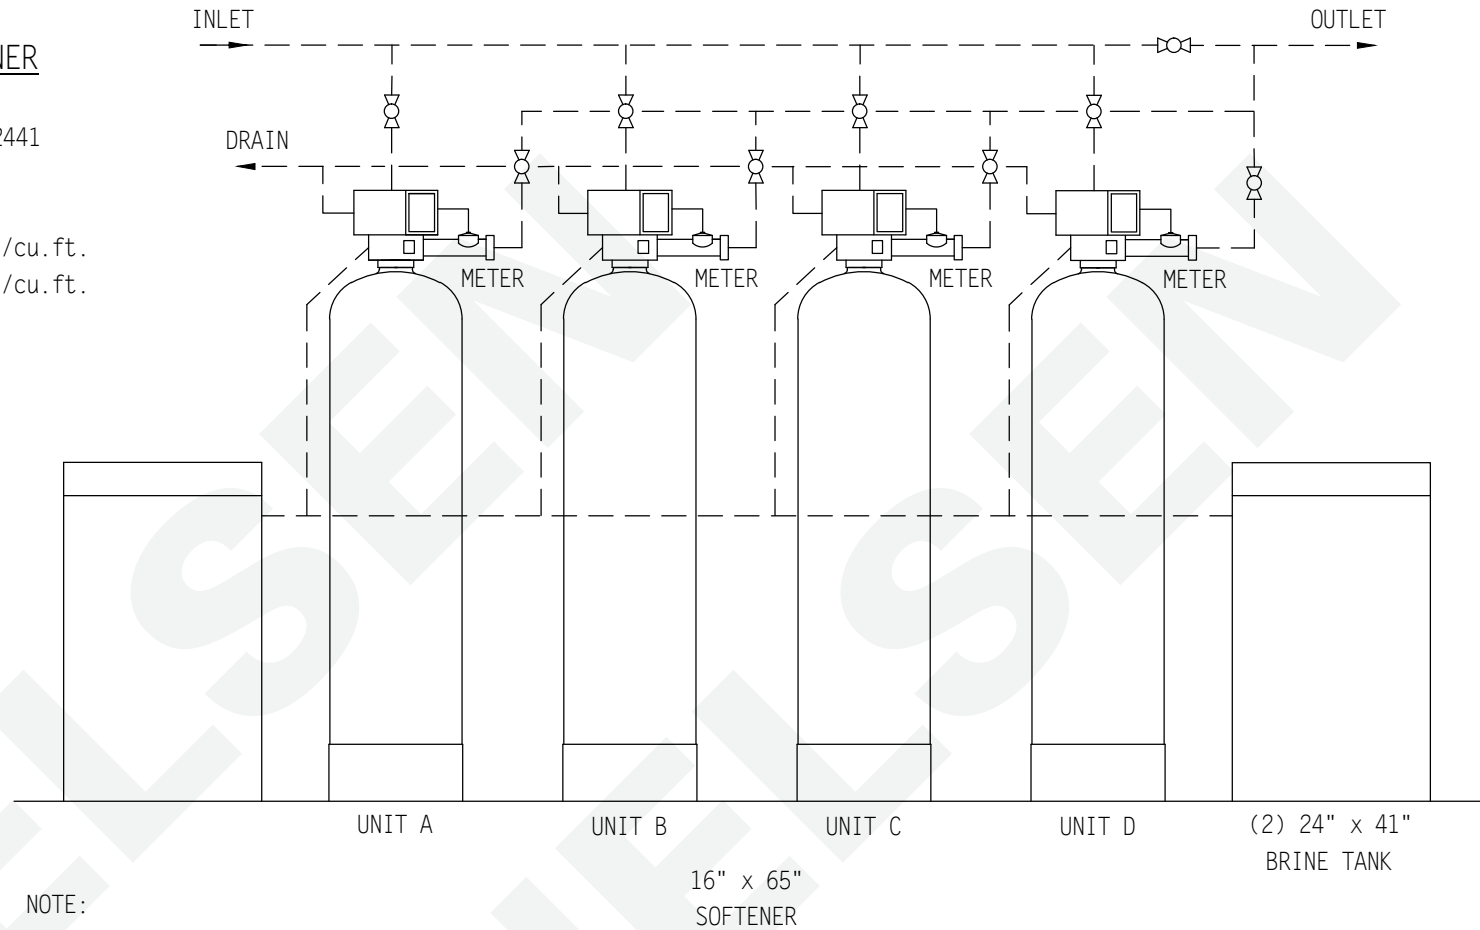

## BRINE TANK

MODEL NO. BT2441R-454HF-5

TANK SIZE: 24" x 41"

POLYETHYLENE

CAPACITY: (each tank)

81 gals.

700 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 1,740 lbs.

## NOTE:

ALL DASHED PIPE, VALVES, AND FITTINGS NOT PROVIDED BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

132"L x 24"W x 78"H

PEAK FLOWS ARE NOT RECOMMENDED FOR EXTENDED PERIODS OF TIME.

16" x 65"  
SOFTENER

(2) 24" x 41"  
BRINE TANK

**NELSEN**  
CORPORATION

**NELSEN CORPORATION**  
OHIO • ARIZONA • TEXAS • FLORIDA  
5151 PORTSIDE DRIVE - MEDINA, OH 44256  
800-362-9686  
NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.  
SOFTENER 120K COMPOSITE TANK  
QUADPLEX NXT SYSTEM

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

DRAWN BY:	RAR
DATE:	03-07-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.  
29/17NXT2-QUAD-120-C2441