

# QUADPLEX NXT2 SOFTENER

MODEL NO. 29/17NXT2-QUAD-600-C5060

CAPACITY: (each tank)

MIN. 480,000 grs. @ 10 lbs./cu.ft.

MAX. 600,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)

NORMAL 100 gpm.

PEAK 140 gpm.

BACKWASH 35 gpm.

TANK SIZE: 36" x 72"

COMPOSITE

MEDIA: (each tank)

RESIN 20 cu.ft.

GRAVEL 500 lbs.

PIPE SIZE:


INLET 2"

OUTLET 2"

DRAIN 1"

BRINE 1/2"

METER 2"

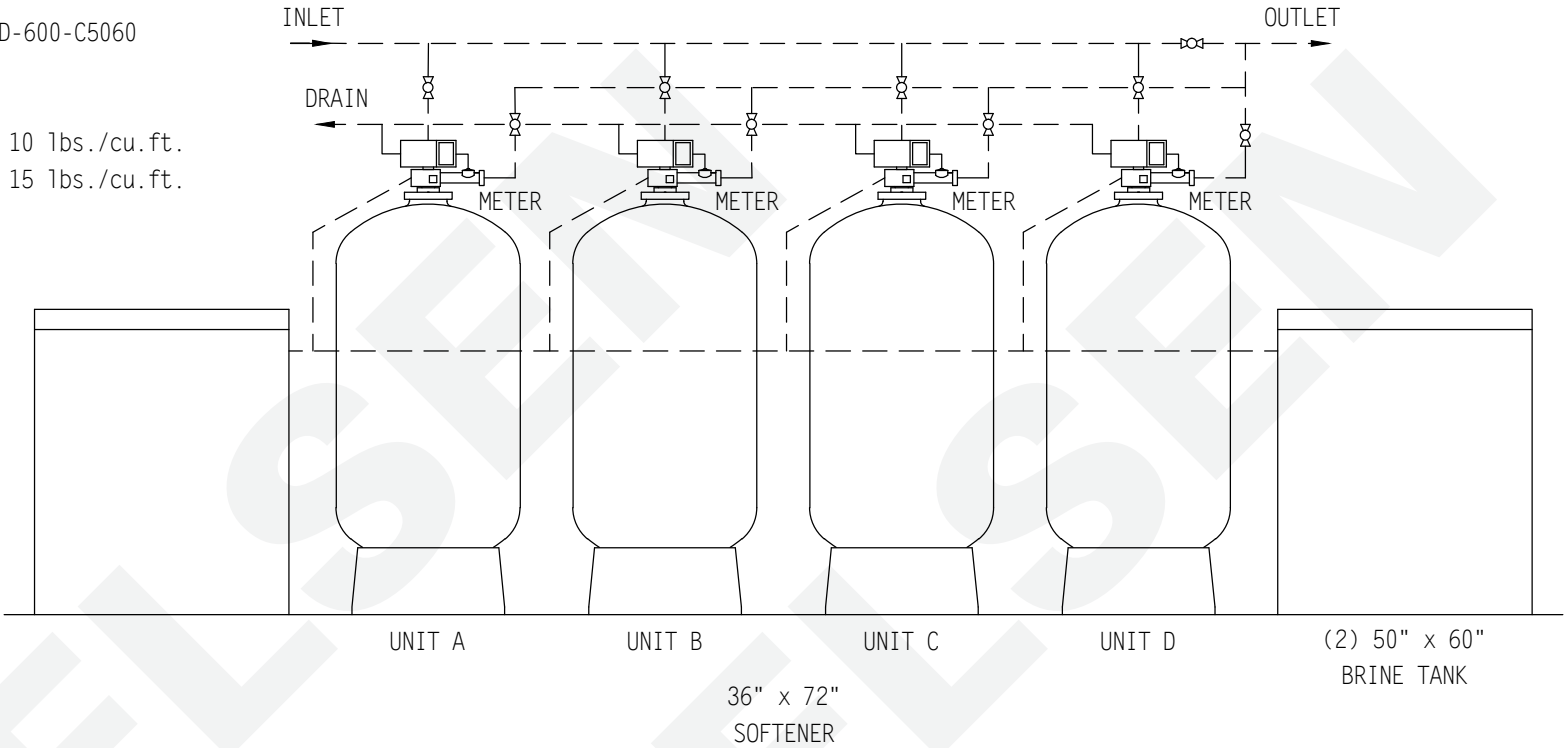

## BRINE TANK

MODEL NO. BT5060R-454HF-5

TANK SIZE: 50" x 60"

POLYETHYLENE

CAPACITY: (each tank)

500 gals.

4,500 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 8,460 lbs.

## NOTE:

ALL DASHED PIPE, VALVES, AND FITTINGS NOT PROVIDED BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

264"L x 50"W x 95"H

PEAK FLOWS ARE NOT RECOMMENDED FOR EXTENDED PERIODS OF TIME.

**DO NOT SCALE DRAWING**

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

**NELSEN**  
CORPORATION

**NELSEN CORPORATION**  
OHIO • ARIZONA • TEXAS • FLORIDA  
5151 PORTSIDE DRIVE - MEDINA, OH 44256  
800-362-9686  
NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.  
SOFTENER 600K COMPOSITE TANK  
QUADPLEX NXT2 SYSTEM

DRAWN BY:	RAR
DATE:	03-07-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.  
29/17NXT2-QUAD-600-C5060