

SOFTENER

MODEL NO. MT315/18T-210

CAPACITY:

MIN. 168,000 grs. @ 10 lbs./cu.ft.

MAX. 210,000 grs. @ 15 lbs./cu.ft.

FLOW RATE:

NORMAL 55 gpm.

PEAK 77 gpm.

BACKWASH 12 gpm.

TANK SIZE: 21" x 62"

COMPOSITE

MEDIA:

RESIN 7 cu.ft.

GRAVEL 150 lbs.

PIPE SIZE:

INLET 2"

OUTLET 2"

DRAIN 2"

BRINE 1"

BRINE TANK

MODEL NO. BT2450R-454HF-5

TANK SIZE: 24" x 50"

POLYETHYLENE

CAPACITY:

100 gals.

850 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 821 lbs.


SPACE REQUIRED (APPROX)

49"L X 24"W X 74"H

NOTE:

ALL DASHED PIPE, VALVES,
AND FITTINGS NOT PROVIDED
BY NELSEN CORPORATION.

PEAK FLOWS ARE NOT
RECOMMENDED FOR EXTENDED
PERIODS OF TIME.

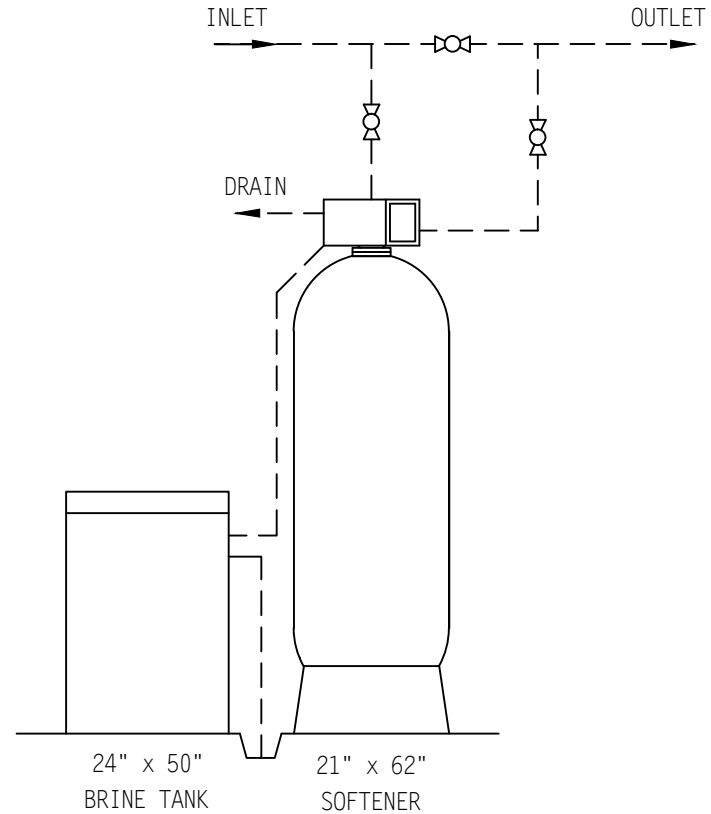

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

NELSEN CORPORATION	NELSEN CORPORATION OHIO • ARIZONA • TEXAS • FLORIDA 3250 BARBER RD - NORTON, OH 44203 800-362-9686 NELSENCORP.COM/COMMERCIAL
------------------------------	---

GENERAL ARRANGEMENT DWG.
SOFTENER 210K
SYSTEM 4-TIMECLOCK

DRAWN BY:	R. ROBESON	DWG. NO.
DATE:	04-28-10	MT315/18T-210
CHECKED BY:		
PAGE 1 OF 1	REV: 06-22-12	