

# SOFTENER

MODEL NO. MT315/18T-450

**CAPACITY:**

MIN. 360,000 grs. @ 10 lbs./cu.ft.  
 MAX. 450,000 grs. @ 15 lbs./cu.ft.

**FLOW RATE:**

NORMAL 75 gpm.  
 PEAK 105 gpm.  
 BACKWASH 25 gpm.

TANK SIZE: 30" x 72"  
 COMPOSITE

**MEDIA:**

RESIN 15 cu.ft.  
 GRAVEL 350 lbs.

**PIPE SIZE:**

INLET 2"  
 OUTLET 2"  
 DRAIN 2"  
 BRINE 1"

BRINE TANK

MODEL NO. BT3948R-494-5

TANK SIZE: 39" x 48"  
 POLYETHYLENE

**CAPACITY:**

250 gals.  
 2,200 lbs./salt

BRINE VALVE: 494  
 BRINE WELL: 5"

**WEIGHT (APPROX)**

TOTAL SHIPPING 1,615 lbs.


**SPACE REQUIRED (APPROX)**

73"L X 39"W X 92"H

**NOTE:**

ALL DASHED PIPE, VALVES,  
 AND FITTINGS NOT PROVIDED  
 BY NELSEN CORPORATION.

PEAK FLOWS ARE NOT  
 RECOMMENDED FOR EXTENDED  
 PERIODS OF TIME.

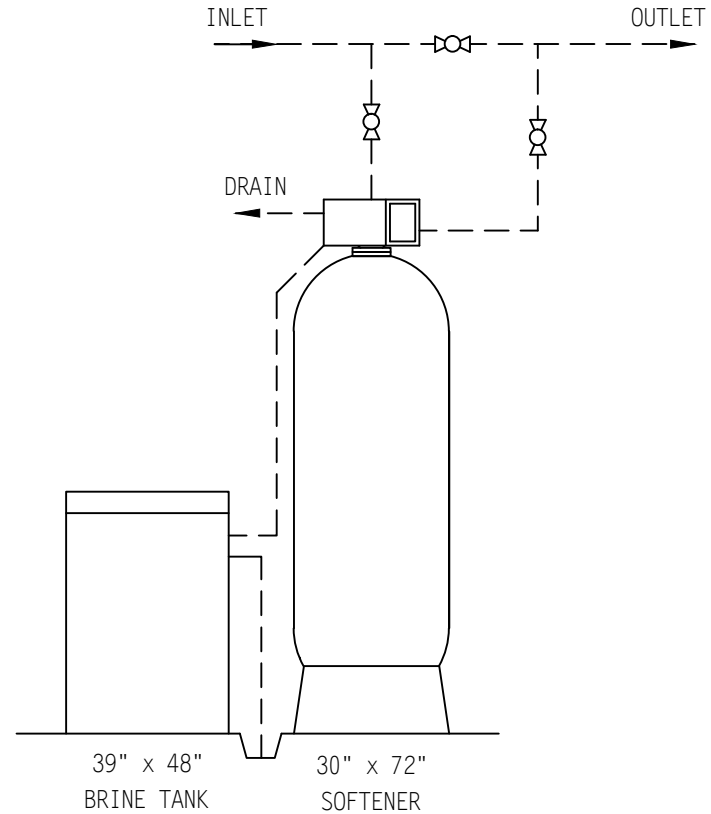

**DO NOT SCALE DRAWING**

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

<b>NELSEN</b>		<b>NELSEN CORPORATION</b>
CORPORATION		OHIO • ARIZONA • TEXAS • FLORIDA 3250 BARBER RD - NORTON, OH 44203 800-362-9686 NELSENCORP.COM/COMMERCIAL
GENERAL ARRANGEMENT DWG.		
SOFTENER 450K		
SYSTEM 4-TIMECLOCK		
DRAWN BY:	R. ROBESON	DWG. NO.
DATE:	04-28-10	<b>MT315/18T-450</b>
CHECKED BY:		
PAGE 1 OF 1	REV: 06-22-12	