

SOFTENER

MODEL NO. MT315/18T-600

CAPACITY:

MIN. 480,000 grs. @ 10 lbs./cu.ft.

MAX. 600,000 grs. @ 15 lbs./cu.ft.

FLOW RATE:

NORMAL 80 gpm.

PEAK 110 gpm.

BACKWASH 35 gpm.

TANK SIZE: 36" x 72"

COMPOSITE

MEDIA:

RESIN 20 cu.ft.

GRAVEL 500 lbs.

PIPE SIZE:

INLET 2"

OUTLET 2"

DRAIN 2"

BRINE 1"

BRINE TANK

MODEL NO. BT5060R-494-5

TANK SIZE: 50" x 60"

POLYETHYLENE

CAPACITY:

500 gals.

4,500 lbs./salt

BRINE VALVE: 494

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 2,150 lbs.


SPACE REQUIRED (APPROX)

82"L X 42"W X 93"H

NOTE:

ALL DASHED PIPE, VALVES,
AND FITTINGS NOT PROVIDED
BY NELSEN CORPORATION.

PEAK FLOWS ARE NOT
RECOMMENDED FOR EXTENDED
PERIODS OF TIME.

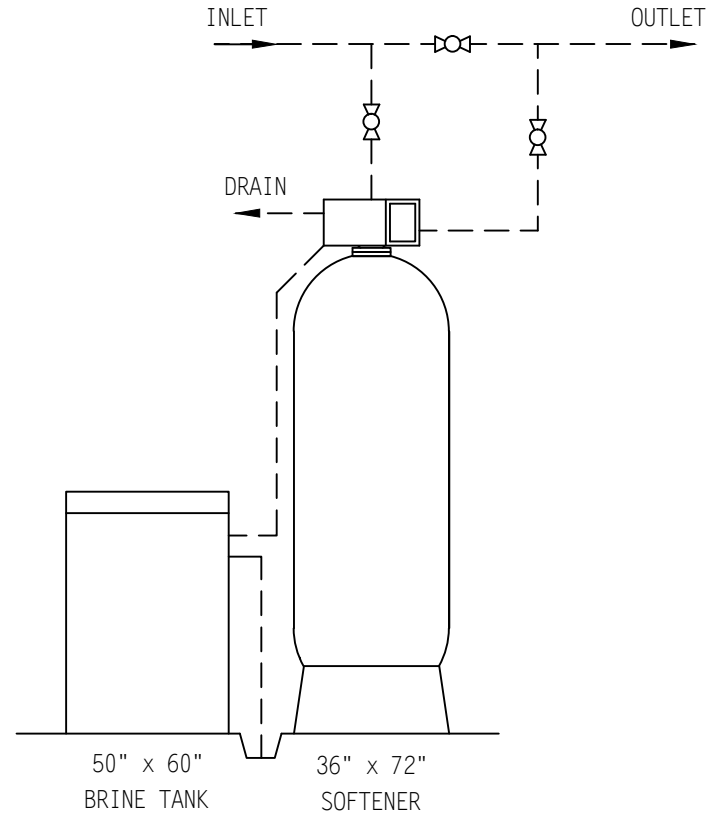

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

NELSEN		NELSEN CORPORATION
CORPORATION		OHIO • ARIZONA • TEXAS • FLORIDA 3250 BARBER RD - NORTON, OH 44203 800-362-9686 NELSENCORP.COM/COMMERCIAL
GENERAL ARRANGEMENT DWG.		
SOFTENER 600K		
SYSTEM 4-TIMECLOCK		
DRAWN BY:	R. ROBESON	DWG. NO.
DATE:	04-28-10	MT315/18T-600
CHECKED BY:		
PAGE 1 OF 1	REV: 06-22-12	