

QUAPLEX SOFTENER

MODEL NO. NCSMF-29/17NXT2-QUAD-210-C2450

CAPACITY: (each tank)

MIN. 168,000 grs. @ 10 lbs./cu.ft.

MAX. 210,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)

NORMAL 55 gpm.

PEAK 77 gpm.

BACKWASH 12 gpm.

TANK SIZE: 21" x 62"

100 PSI COMPOSITE

MEDIA: (each tank)

RESIN 7 cu.ft.

GRAVEL 150 lbs.

PIPE SIZE: PVC


INLET 2"

OUTLET 2"

DRAIN 1"

BRINE 1/2"

METER 2"

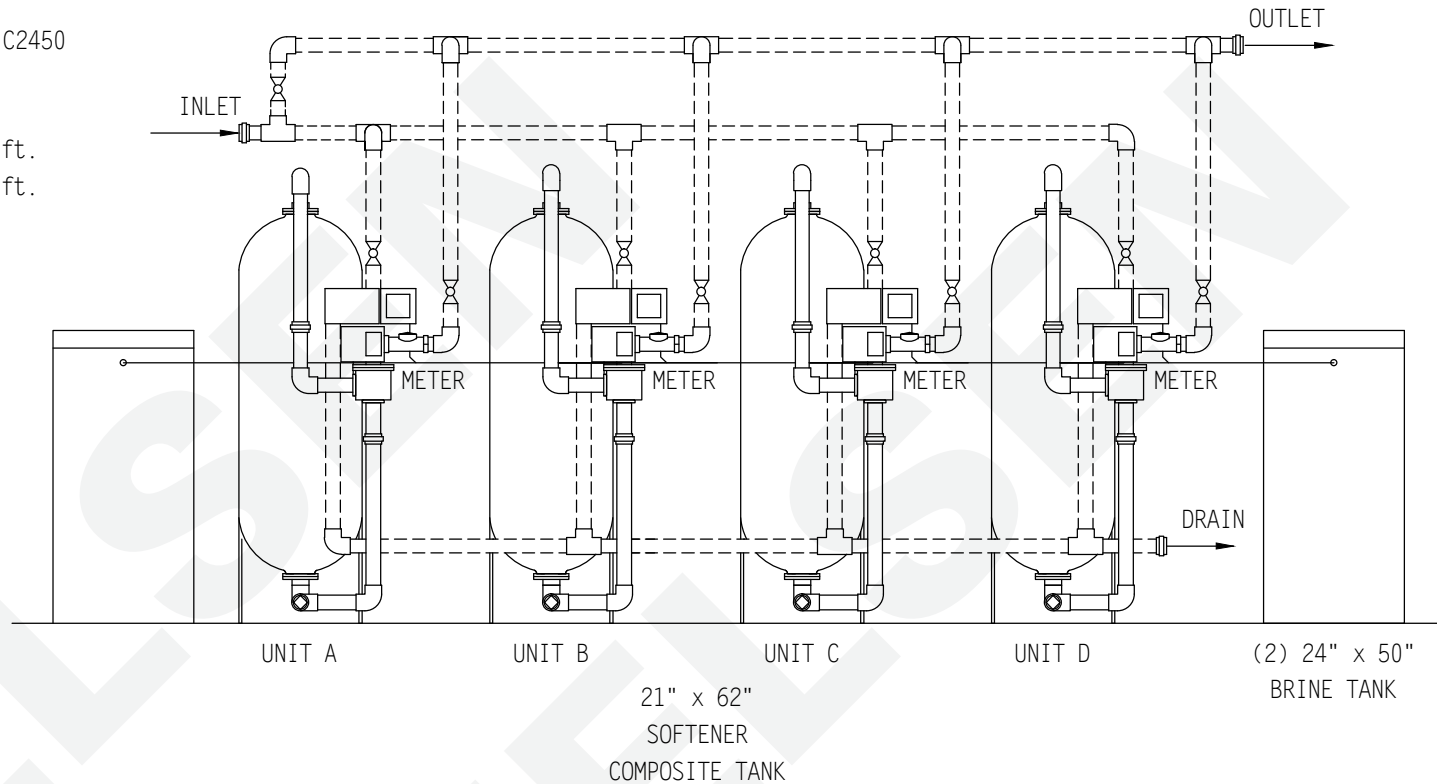

BRINE TANK

MODEL NO. BT2450R-454HF-5

TANK SIZE: 24" x 50"

POLYETHYLENE

CAPACITY: (each tank)

100 gal.s.

900 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 2,750 lbs.

NOTE:

ALL DASHED PIPE, VALVES,
AND FITTINGS NOT PROVIDED
BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

150"L x 34"W x 79"H

PEAK FLOWS ARE NOT

RECOMMENDED FOR EXTENDED

PERIODS OF TIME.

DO NOT SCALE DWG.

THIS DRAWING IS ISSUED IN CONFIDENCE AND
CANNOT BE REPRODUCED OR USED TO
MANUFACTURE ANYTHING SHOWN OR REFERRED
TO WITHOUT DIRECT WRITTEN PERMISSION FROM
NELSEN CORPORATION.

NELSEN
CORPORATION

NELSEN CORPORATION
5151 PORTSIDE DR - MEDINA, OH 44256
800-362-9686
OHIO • ARIZONA • TEXAS • FLORIDA

GENERAL ARRANGEMENT DWG.
SOFTENER 210K COMPOSITE TANK
QUADPLEX PROGRESSIVE SYSTEM

DRAWN BY:	RAR
DATE:	01-27-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.
NCSMF-29/17NXT2-QUAD-210-C2450