

# TRIPLEX SOFTENER

MODEL NO. NCSMF-29/17NXT-TRI-600-C5060

**CAPACITY:**

MIN. 480,000 grs. @ 10 lbs./cu.ft. (each tank)  
 MAX. 600,000 grs. @ 15 lbs./cu.ft. (each tank)

**FLOW RATE:**

NORMAL 100 gpm.  
 PEAK 140 gpm.  
 BACKWASH 35 gpm.


TANK SIZE: 36" x 72"  
 100 PSI COMPOSITE

**MEDIA:**

RESIN 20 cu.ft. (each tank)  
 GRAVEL 500 lbs. (each tank)

**PIPE SIZE: PVC**

INLET 2"  
 OUTLET 2"  
 DRAIN 1"  
 BRINE 1/2"  
 METER 3"

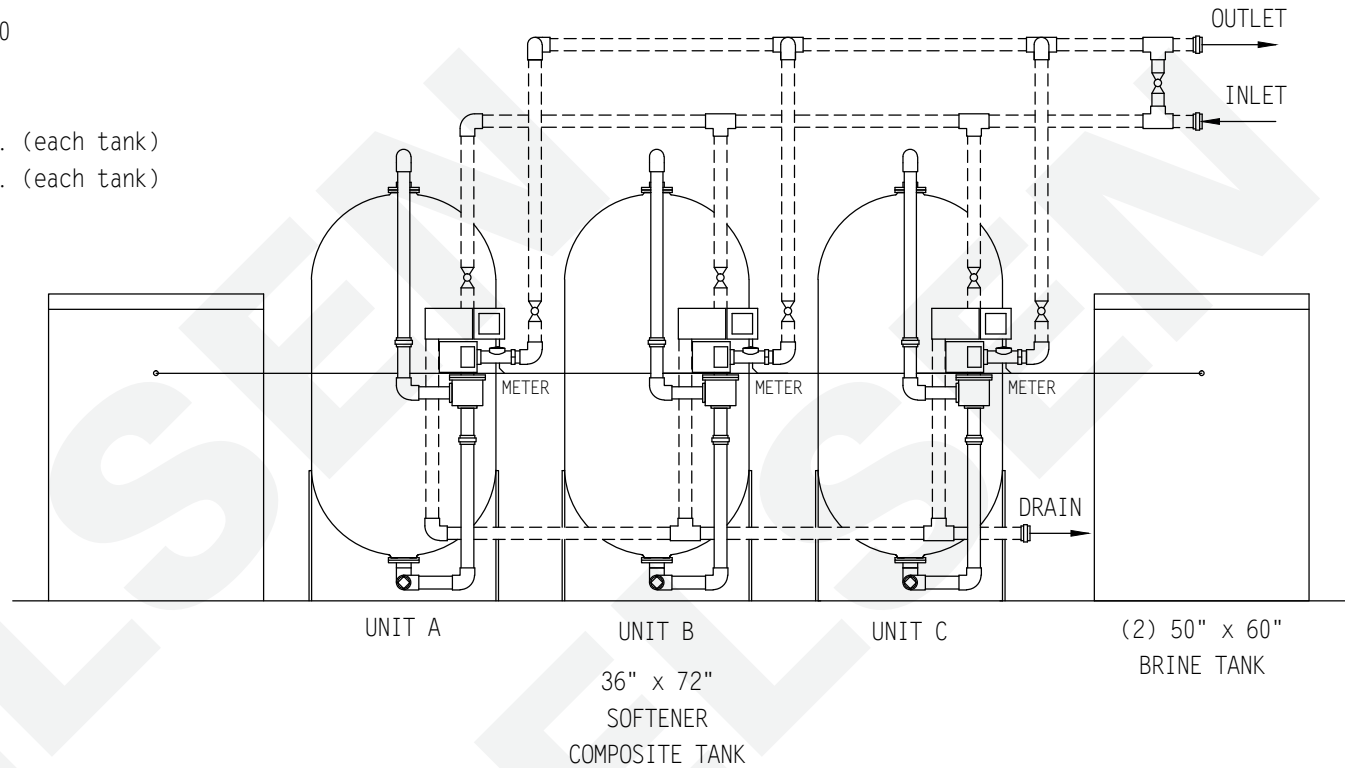

**BRINE TANK**

MODEL NO. BT5060R-454HF-5

TANK SIZE: 50" x 60"  
 POLYETHYLENE

CAPACITY:  
 500 gals.  
 4,500 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)  
 TOTAL SHIPPING 6,210 lbs.

**NOTE:**

ALL DASHED PIPE, VALVES,  
 AND FITTINGS NOT PROVIDED  
 BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)  
 222"L x 50"W x 95"H

PEAK FLOWS ARE NOT  
 RECOMMENDED FOR EXTENDED  
 PERIODS OF TIME.

**DO NOT SCALE DWG.**

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
 CANNOT BE REPRODUCED OR USED TO  
 MANUFACTURE ANYTHING SHOWN OR REFERRED  
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
 NELSEN CORPORATION.

		NELSEN CORPORATION 5151 PORTSIDE DR - MEDINA, OH 44256 800-362-9686 OHIO • ARIZONA • TEXAS • FLORIDA	
		GENERAL ARRANGEMENT DWG. SOFTENER 600K COMPOSITE TANK TRIPLEX PROGRESSIVE SYSTEM	
DRAWN BY: RAR	DATE: 01-10-17	DWG. NO. NCSMF-29/17NXT-TRI-600-C5060	
CHECKED BY:	REV:		
PAGE 1 OF 1			