

## DUPLEX NXT2 SOFTENER

MODEL NO. 39/18NXT2-DUP-300-C3048

CAPACITY: (each tank)

MIN. 240,000 grs. @ 10 lbs./cu.ft.

MAX. 300,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)

NORMAL 120 gpm.

PEAK 170 gpm.

BACKWASH 15 gpm.

TANK SIZE: 24" x 72"

COMPOSITE

MEDIA: (each tank)

RESIN 10 cu.ft.

GRAVEL 250 lbs.

PIPE SIZE:

INLET 3"

OUTLET 3"

DRAIN 2"

BRINE 1"

METER 3"

### BRINE TANK

MODEL NO. BT3048R-494-5

TANK SIZE: 30"x 48"

POLYETHYLENE

CAPACITY:

145 gals.

1,200 lbs./salt

BRINE VALVE: 494

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 2,470 lbs.


### NOTE:

ALL DASHED PIPE, VALVES,  
AND FITTINGS NOT PROVIDED  
BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

86"L x 30"W x 92"H

PEAK FLOWS ARE NOT  
RECOMMENDED FOR EXTENDED  
PERIODS OF TIME.

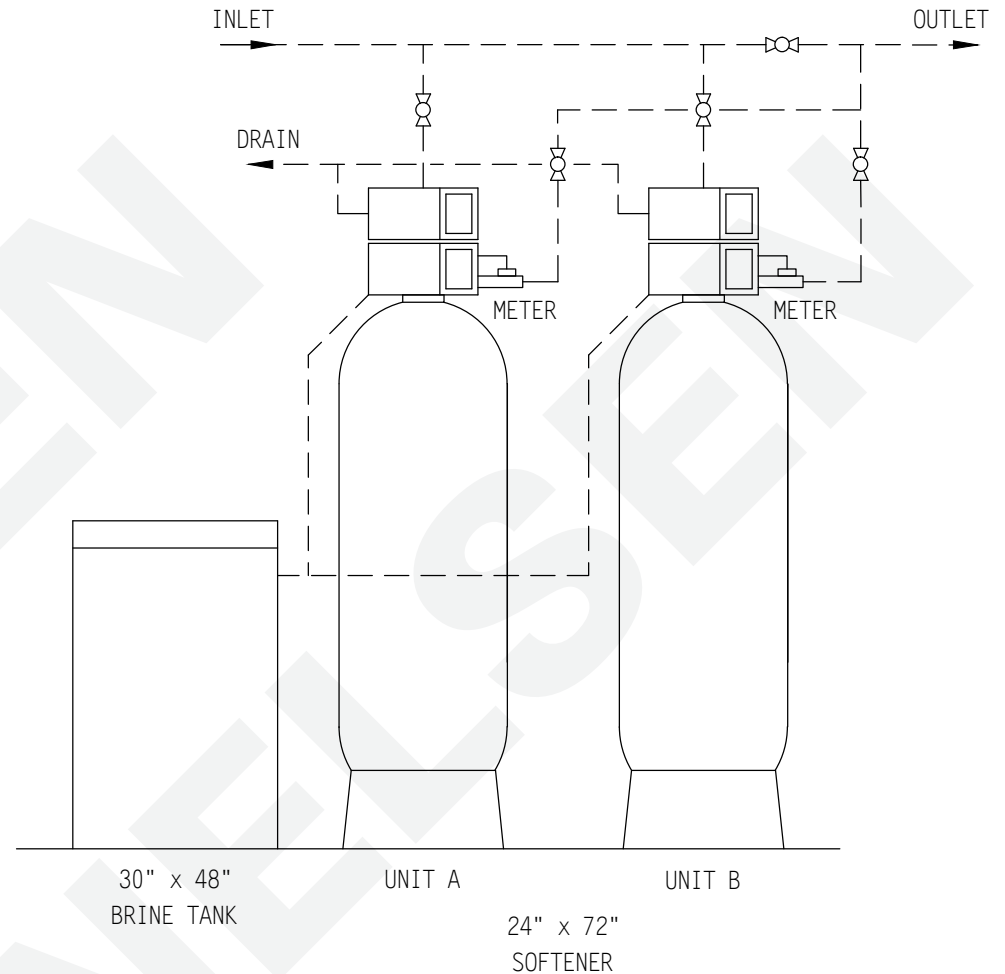

**DO NOT SCALE DRAWING**

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
CANNOT BE REPRODUCED OR USED TO  
MANUFACTURE ANYTHING SHOWN OR REFERRED  
TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
NELSEN CORPORATION.

**NELSEN**  
CORPORATION

**NELSEN CORPORATION**  
OHIO • ARIZONA • TEXAS • FLORIDA  
5151 PORTSIDE DRIVE - MEDINA, OH 44256  
800-362-9686  
NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.  
SOFTENER 300K COMPOSITE TANK  
DUPLEX NXT2 SYSTEM

DRAWN BY:	RAR
DATE:	03-13-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.  
**39/18NXT2-DUP-300-C3048**