

QUADPLEX NXT2 SOFTENER

MODEL NO. 39/18NXT2-QUAD-1200-C5060

CAPACITY: (each tank)

MIN. 960,000 grs. @ 10 lbs./cu.ft.

MAX. 1,200,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)

NORMAL 205 gpm.

PEAK 280 gpm.

BACKWASH 65 gpm.

TANK SIZE: 48" x 72"

COMPOSITE

MEDIA: (each tank)

RESIN 40 cu.ft.

GRAVEL 900 lbs.

PIPE SIZE:


INLET 3"

OUTLET 3"

DRAIN 2"

BRINE 1"

METER 3"

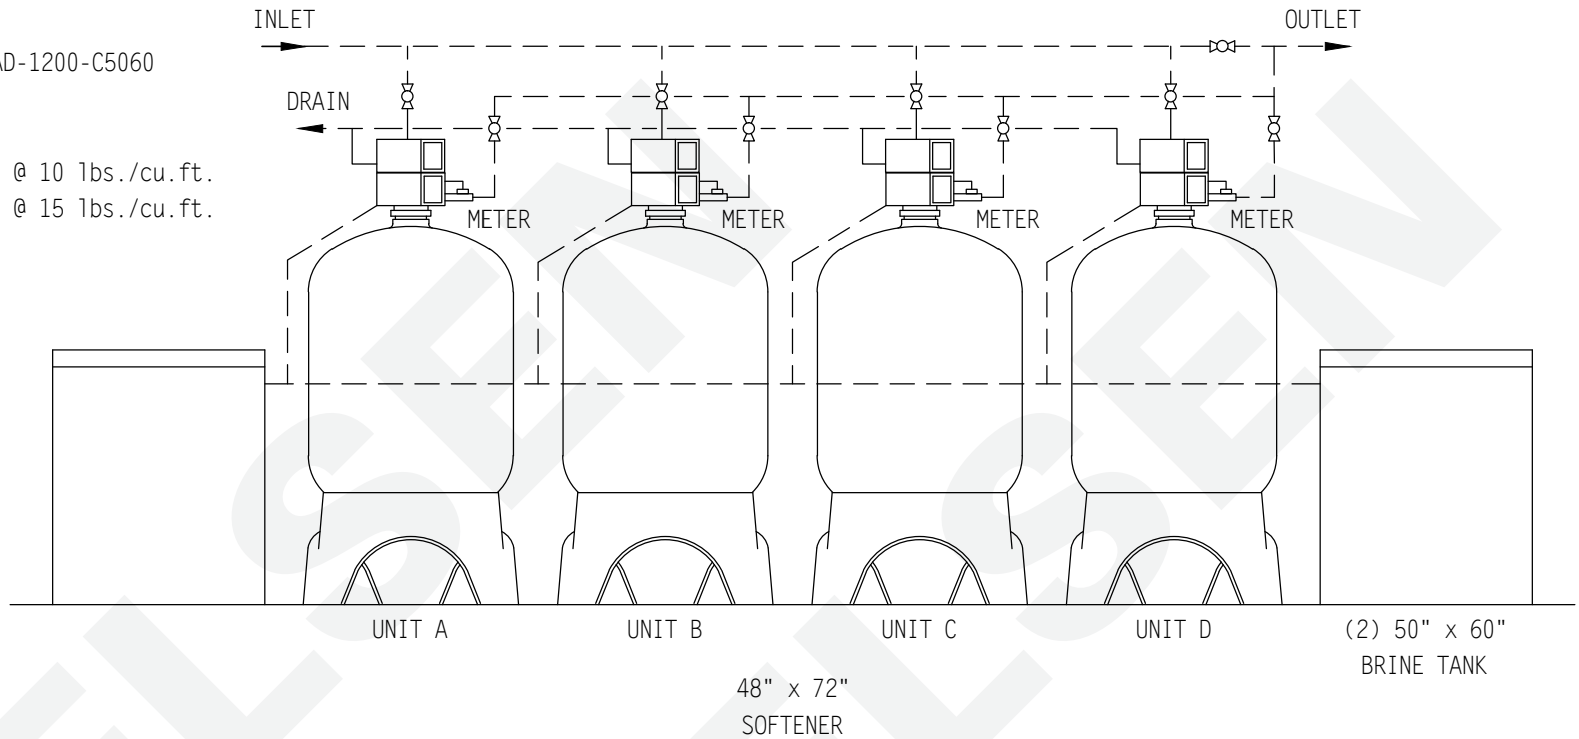

BRINE TANK

MODEL NO. BT5060R-494-5

TANK SIZE: 50" x 60"

POLYETHYLENE

CAPACITY: (each tank)

500 gals.

4,500 lbs./salt

BRINE VALVE: 494

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 17,200 lbs.

NOTE:

ALL DASHED PIPE, VALVES, AND FITTINGS NOT PROVIDED BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

312"L x 50"W x 106"H

PEAK FLOWS ARE NOT RECOMMENDED FOR EXTENDED PERIODS OF TIME.

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

NELSEN
CORPORATION

NELSEN CORPORATION
OHIO • ARIZONA • TEXAS • FLORIDA
5151 PORTSIDE DRIVE - MEDINA, OH 44256
800-362-9686
NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.
SOFTENER 1200K COMPOSITE TANK
QUADPLEX NXT2 SYSTEM

DRAWN BY:	RAR	DWG. NO.
DATE:	03-16-17	39/18NXT2-QUAD-1200-C5060
CHECKED BY:		
PAGE 1 OF 1	REV:	