

# QUADPLEX NXT2 SOFTENER

MODEL NO. 39/18NXT2-QUAD-600-C5060

CAPACITY: (each tank)

MIN. 480,000 grs. @ 10 lbs./cu.ft.

MAX. 600,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)

NORMAL 185 gpm.

PEAK 250 gpm.

BACKWASH 35 gpm.

TANK SIZE: 36" x 72"

COMPOSITE

MEDIA: (each tank)

RESIN 20 cu.ft.

GRAVEL 500 lbs.

PIPE SIZE:


INLET 3"

OUTLET 3"

DRAIN 2"

BRINE 1"

METER 3"

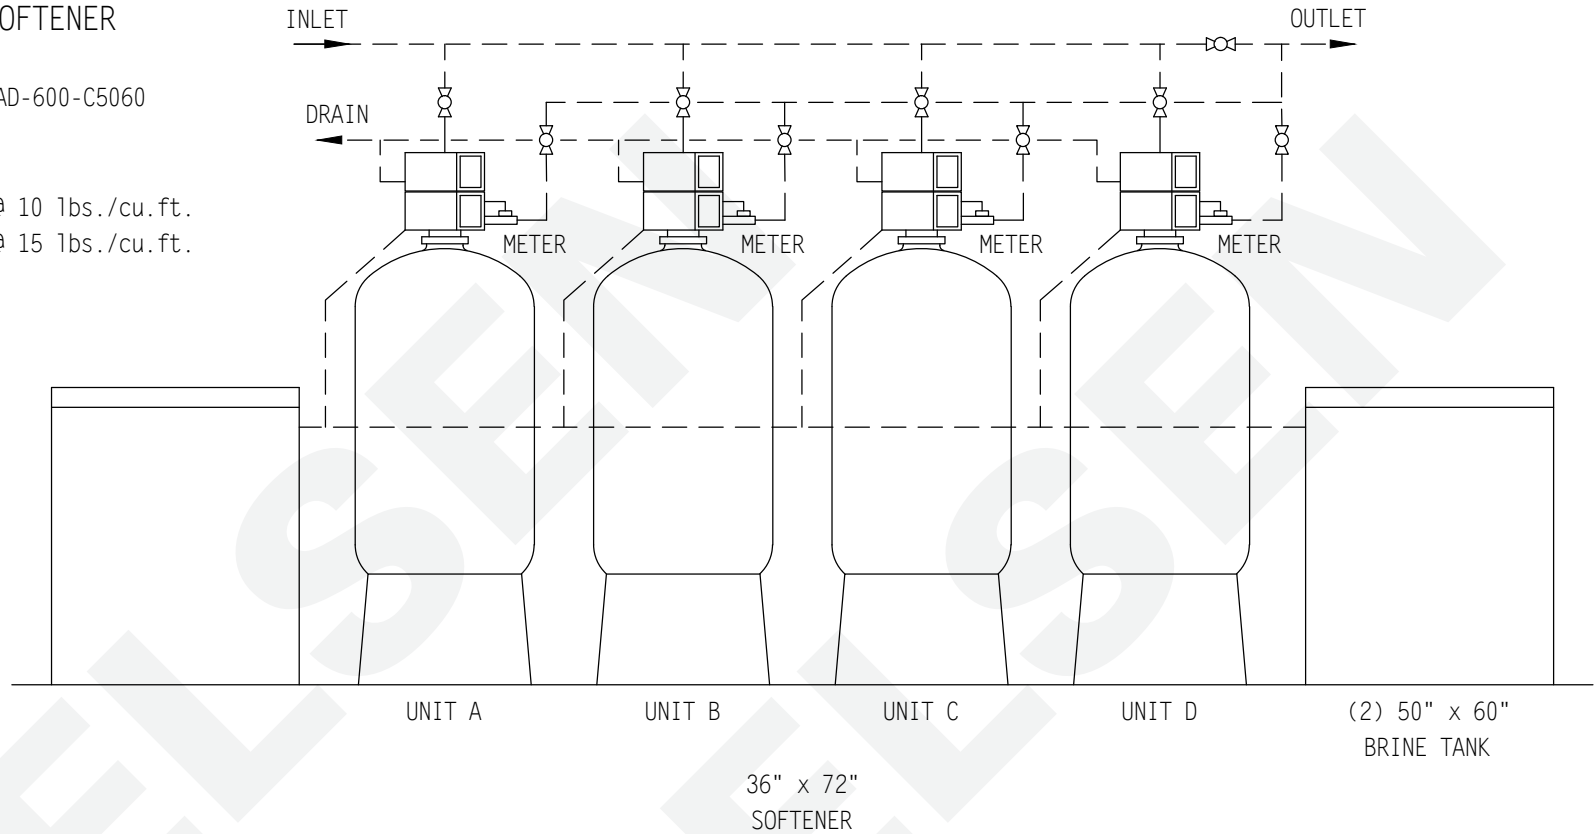

## BRINE TANK

MODEL NO. BT5060R-494-5

TANK SIZE: 50" x 60"

POLYETHYLENE

CAPACITY: (each tank)

500 gals.

4,500 lbs./salt

BRINE VALVE: 494

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 9,000 lbs.

## NOTE:

ALL DASHED PIPE, VALVES,  
AND FITTINGS NOT PROVIDED  
BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

264"L x 50"W x 98"H

PEAK FLOWS ARE NOT  
RECOMMENDED FOR EXTENDED  
PERIODS OF TIME.

**DO NOT SCALE DRAWING**

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
CANNOT BE REPRODUCED OR USED TO  
MANUFACTURE ANYTHING SHOWN OR REFERRED  
TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
NELSEN CORPORATION.

**NELSEN**  
CORPORATION

**NELSEN CORPORATION**  
OHIO • ARIZONA • TEXAS • FLORIDA  
5151 PORTSIDE DRIVE - MEDINA, OH 44256  
800-362-9686  
NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.  
SOFTENER 600K COMPOSITE TANK  
QUADPLEX NXT2 SYSTEM

DRAWN BY:	RAR	DWG. NO.
DATE:	03-16-17	39/18NXT2-QUAD-600-C5060
CHECKED BY:		
PAGE 1 OF 1	REV:	