

# TRIPLEX NXT2 SOFTENER

MODEL NO. 39/18NXT2-TRI-300-C3048


CAPACITY: (each tank)  
 MIN. 240,000 grs. @ 10 lbs./cu.ft.  
 MAX. 300,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)  
 NORMAL 120 gpm.  
 PEAK 170 gpm.  
 BACKWASH 15 gpm.

TANK SIZE: 24" x 72"  
 COMPOSITE

MEDIA: (each tank)  
 RESIN 10 cu.ft.  
 GRAVEL 250 lbs.

PIPE SIZE:  
 INLET 3"  
 OUTLET 3"  
 DRAIN 2"  
 BRINE 1"  
 METER 3"

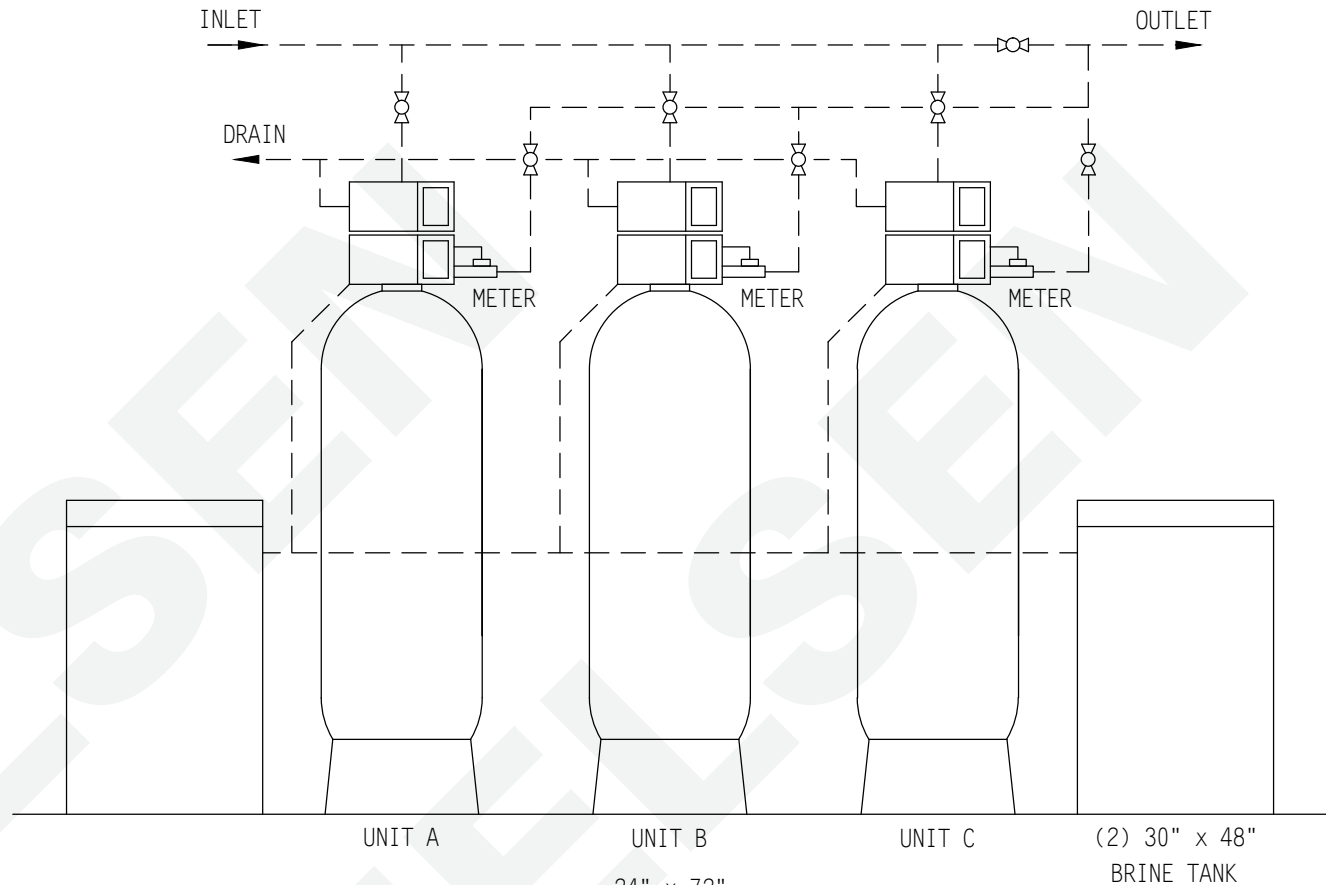

BRINE TANK  
 MODEL NO. BT3048R-494-5  
 TANK SIZE: 30" x 48"  
 POLYETHYLENE

CAPACITY: (each tank)  
 145 gals.  
 1,200 lbs./salt

BRINE VALVE: 494  
 BRINE WELL: 5"

WEIGHT (APPROX)  
 TOTAL SHIPPING 3,750 lbs.

NOTE:  
 ALL DASHED PIPE, VALVES,  
 AND FITTINGS NOT PROVIDED  
 BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)  
 148"L x 30"W x 92"H

PEAK FLOWS ARE NOT  
 RECOMMENDED FOR EXTENDED  
 PERIODS OF TIME.

**DO NOT SCALE DRAWING**

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

<b>NELSEN</b>		<b>NELSEN CORPORATION</b>	
CORPORATION		OHIO • ARIZONA • TEXAS • FLORIDA	
5151 PORTSIDE DRIVE - MEDINA, OH 44256		800-362-9686	
NELSENCORP.COM/COMMERCIAL			
GENERAL ARRANGEMENT DWG.			
SOFTENER 300K COMPOSITE TANK			
TRIPLEX NXT2 SYSTEM			
DRAWN BY:	RAR	DWG. NO.	
DATE:	03-13-17	<b>39/18NXT2-TRI-300-C3048</b>	
CHECKED BY:			
PAGE 1 OF 1	REV:		