

TRIPLEX NXT2 SOFTENER

MODEL NO. 39/18NXT2-TRI-450-C3948


CAPACITY: (each tank)
 MIN. 360,000 grs. @ 10 lbs./cu.ft.
 MAX. 450,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)
 NORMAL 155 gpm.
 PEAK 210 gpm.
 BACKWASH 25 gpm.

TANK SIZE: 30" x 72"
 COMPOSITE

MEDIA: (each tank)
 RESIN 15 cu.ft.
 GRAVEL 350 lbs.

PIPE SIZE:
 INLET 3"
 OUTLET 3"
 DRAIN 2"
 BRINE 1"
 METER 3"

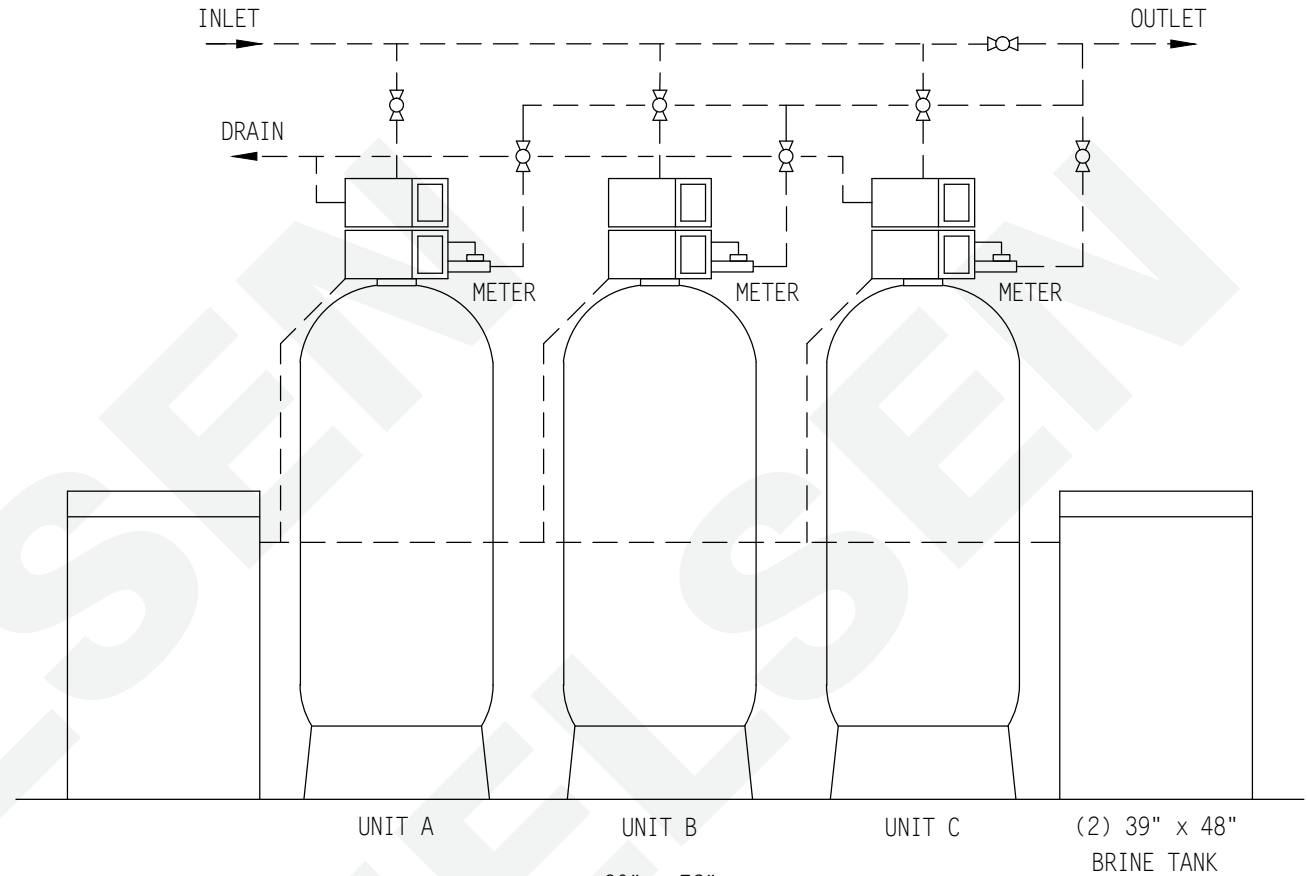

BRINE TANK
 MODEL NO. BT3948R-494-5
 TANK SIZE: 39" x 48"
 POLYETHYLENE
 CAPACITY: (each tank)
 250 gals.
 2,200 lbs./salt
 BRINE VALVE: 494
 BRINE WELL: 5"

NOTE:
 ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)
 184"L x 39"W x 96"H

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

WEIGHT (APPROX)
 TOTAL SHIPPING 5,100 lbs.

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

		NELSEN CORPORATION OHIO • ARIZONA • TEXAS • FLORIDA 5151 PORTSIDE DRIVE - MEDINA, OH 44256 800-362-9686 NELSENCORP.COM/COMMERCIAL	
		GENERAL ARRANGEMENT DWG. SOFTENER 450K COMPOSITE TANK TRIPLEX NXT2 SYSTEM	
DRAWN BY: DATE: CHECKED BY: PAGE 1 OF 1	RAR 03-14-17	DWG. NO. 39/18NXT2-TRI-450-C3948	