

# TWIN SOFTENER

MODEL NO. 95/17M-120-C2441

**CAPACITY:**

MIN. 96,000 grs. @ 10 lbs./cu.ft.  
 MAX. 120,000 grs. @ 15 lbs./cu.ft.

**FLOW RATE:**

NORMAL 20 gpm.  
 PEAK 40 gpm.  
 BACKWASH 7 gpm.

TANK SIZE: 16" x 65"


COMPOSITE

**MEDIA:**

RESIN 4 cu.ft.  
 GRAVEL 75 lbs.

**PIPE SIZE"**

INLET 1-1/2"  
 OUTLET 1-1/2"  
 DRAIN 1"  
 BRINE 1/2"  
 METER 1-1/2"

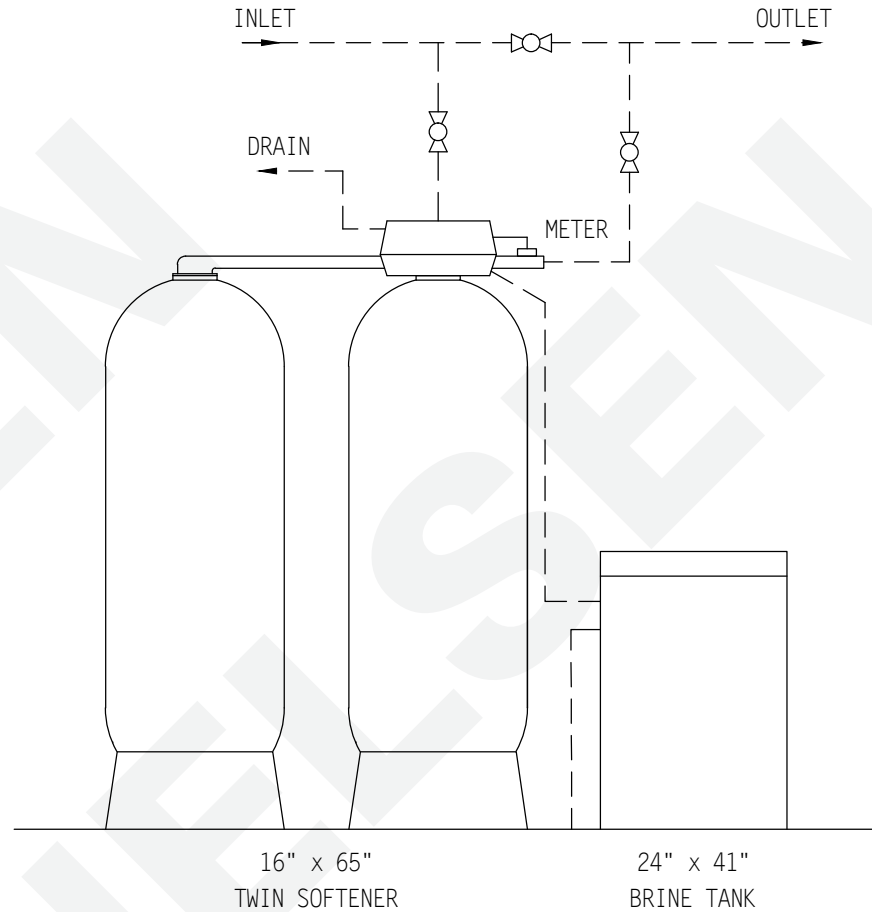

BRINE TANK

MODEL NO. BT2441R-454HF-5

TANK SIZE: 24" x 41"

POLYETHYLENE

**CAPACITY:**

81 gals.  
 700 lbs./salt

BRINE VALVE: 454

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 841 lbs.

**NOTE:**

ALL DASHED PIPE, VALVES, AND FITTINGS NOT PROVIDED BY NELSEN CORPORATION.

**SPACE REQUIRED (APPROX)**

62"L x 24"W x 75"H

PEAK FLOWS ARE NOT RECOMMENDED FOR EXTENDED PERIODS OF TIME.

**DO NOT SCALE DWG.**

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

		<b>NELSEN CORPORATION</b> OHIO • ARIZONA • TEXAS • FLORIDA 5151 PORTSIDE DRIVE - MEDINA, OH 4425 800-362-9686 NELSENCORP.COM/COMMERCIAL	
		GENERAL ARRANGEMENT DWG. SOFTENER 120K 9500 TWIN TANK	
DRAWN BY: RAR DATE: 03-01-17 CHECKED BY: PAGE 1 OF 1	REV:	DWG. NO. 95/17M-120-C2441	