

SOFTENER

MODEL NO. 95/17M-150-C2450

CAPACITY:

MIN. 120,000 grs. @ 10 lbs./cu.ft.
 MAX. 150,000 grs. @ 15 lbs./cu.ft.

FLOW RATE:

NORMAL 25 gpm.
 PEAK 50 gpm.
 BACKWASH 9 gpm.

TANK SIZE: 18" x 65"


COMPOSITE

MEDIA:

RESIN 5 cu.ft.
 GRAVEL 100 lbs.

PIPE SIZE"

INLET 1-1/2"
 OUTLET 1-1/2"
 DRAIN 1"
 BRINE 1/2"
 METER 1-1/2"

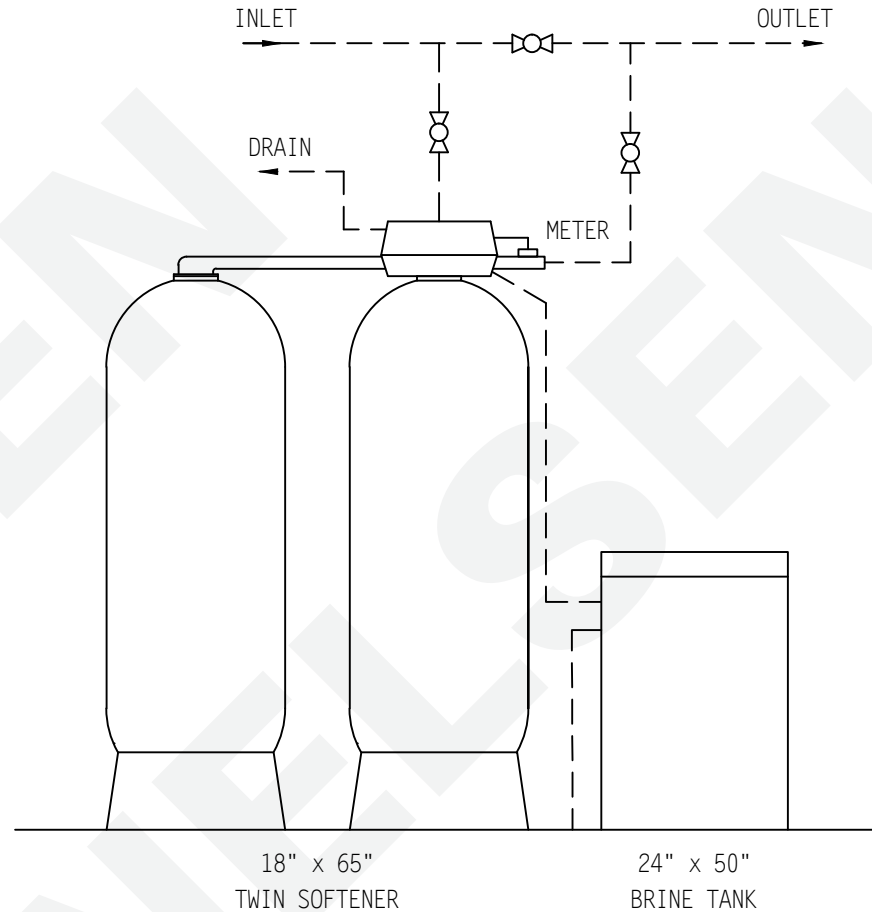

BRINE TANK

MODEL NO. BT2450R-454HF-5

TANK SIZE: 24" x 50"

POLYETHYLENE

CAPACITY:

100 gal.s.
 900 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 1,077 lbs.
 TOTAL OPERATING 2,375 lbs.

NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

68"L x 24"W x 76"H

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

DO NOT SCALE DWG.

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 NELSEN CORPORATION.

NELSEN
 CORPORATION

NELSEN CORPORATION
 OHIO • ARIZONA • TEXAS • FLORIDA
 5151 PORTSIDE DRIVE - MEDINA, OH 4425
 800-362-9686
 NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.

SOFTENER 150K
 9500 TWIN TANK

DRAWN BY:	R. ROBESON
DATE:	08-26-09
CHECKED BY:	
PAGE 1 OF 1	REV: 10-09-14

DWG. NO.
 95/17M-150-C2450