

SOFTENER

MODEL NO. 95/17M-300-C3048

CAPACITY:

MIN. 240,000 grs. @ 10 lbs./cu.ft.
 MAX. 300,000 grs. @ 15 lbs./cu.ft.

FLOW RATE:

NORMAL 40 gpm.
 PEAK 55 gpm.
 BACKWASH 15 gpm.

TANK SIZE: 24" x 72"


COMPOSITE

MEDIA:

RESIN 10 cu.ft.
 GRAVEL 250 lbs.

PIPE SIZE"

INLET 1-1/2"
 OUTLET 1-1/2"
 DRAIN 1"
 BRINE 1/2"
 METER 1-1/2"

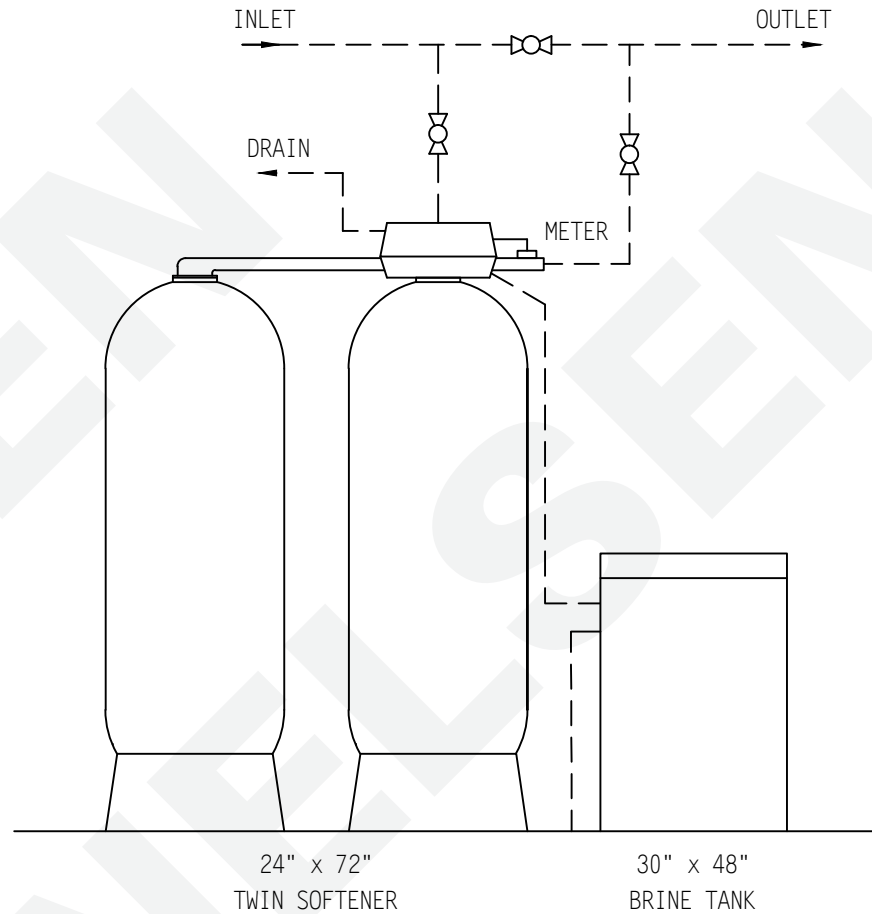

BRINE TANK

MODEL NO. BT3048R-454HF-5

TANK SIZE: 30" x 48"

POLYETHYLENE

CAPACITY:

145 gal.
 1,200 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 2,050 lbs.
 TOTAL OPERATING 4,155 lbs.

NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

84"L x 30"W x 85"H

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

DO NOT SCALE DWG.

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 NELSEN CORPORATION.

		NELSEN CORPORATION OHIO • ARIZONA • TEXAS • FLORIDA 5151 PORTSIDE DRIVE - MEDINA, OH 4425 800-362-9686 NELSENCORP.COM/COMMERCIAL	
		GENERAL ARRANGEMENT DWG. SOFTENER 300K 9500 TWIN TANK	
DRAWN BY:	R. ROBESON	DWG. NO. 95/17M-300-C3048	
DATE:	08-26-09		
CHECKED BY:	_____		
PAGE 1 OF 1	REV: 10-09-14		