

# METER SOFTENER

MODEL NO. 29/17NXT2-150-C2450

## CAPACITY :

MIN. 120,000 grs. @ 10 lbs./cu.ft.  
MAX. 150,000 grs. @ 15 lbs./cu.ft.

## FLOW RATE:

NORMAL 50 gpm.  
PEAK 62 gpm.  
BACKWASH 10 gpm.

TANK SIZE: 18" x 65"

## COMPOSITE

## MEDIA:

RESIN 5 cu. ft.  
GRAVEL 100 lbs.

## PIPE SIZE:

INLET 2"  
OUTLET 2"  
DRAIN 1"  
BRINE 1/2"  
METER 2"

## BRINE TANK

MODEL NO. BT2450R-454HF-5

TANK SIZE: 24" x 50"

POLYETHYLENE

## CAPACITY :

100 gal.s.  
900 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

## WEIGHT (APPROX)

TOTAL SHIPPING 575 lbs.


## NOTE:

ALL DASHED PIPE, VALVES,  
AND FITTINGS NOT PROVIDED  
BY NELSEN CORPORATION.

## SPACE REQUIRED (APPROX)

45"L x 24"W x 78"H

PEAK FLOWS ARE NOT  
RECOMMENDED FOR EXTENDED  
PERIODS OF TIME.

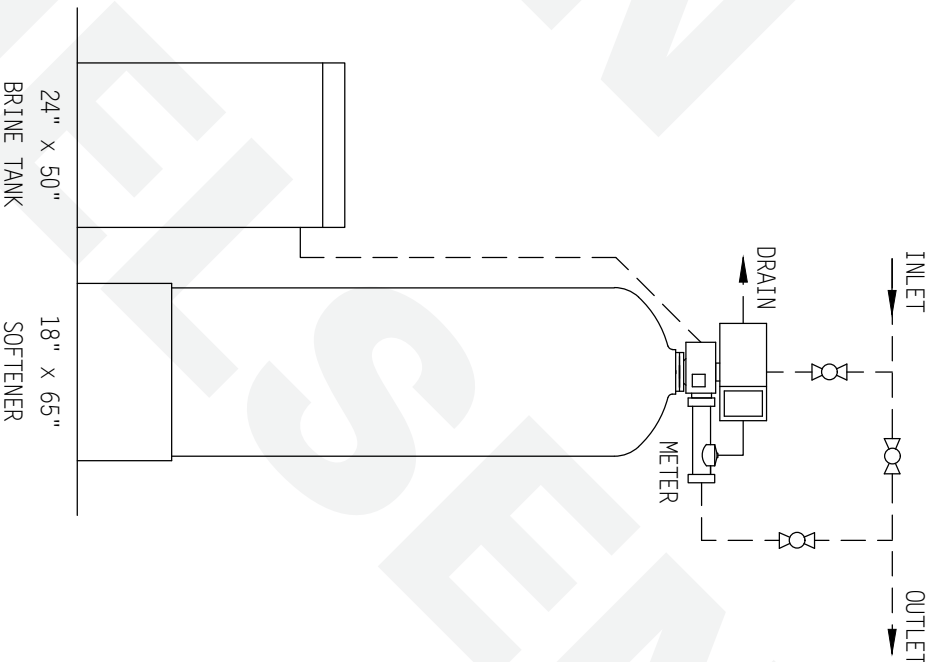

**DO NOT SCALE DRAWING**

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
CANNOT BE REPRODUCED OR USED TO  
MANUFACTURE ANYTHING SHOWN OR REFERRED  
TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
NELSEN CORPORATION.

**NELSEN**  
CORPORATION

NELSENCORP.COM/COMMERCIAL

**NELSEN CORPORATION**  
OHIO • ARIZONA • TEXAS • FLORIDA  
5151 PORTSIDE DR. MEDINA, OH 44256  
800-362-9886

GENERAL ARRANGEMENT DWG.

SOFTENER 150K COMPOSITE TANK

SYSTEM 4-METER

DRAWN BY:	RAR	DWG. NO.
DATE:	03-01-17	
CHECKED BY:		
PAGE 1 OF 1	REV:	

29/17NXT2-150-C2450