

# METER SOFTENER

MODEL NO. 29/17NXT2-210-C2450

**CAPACITY:**

MIN. 168,000 grs. @ 10 lbs./cu.ft.  
 MAX. 210,000 grs. @ 15 lbs./cu.ft.

**FLOW RATE:**

NORMAL 55 gpm.  
 PEAK 77 gpm.  
 BACKWASH 12 gpm.

TANK SIZE: 21" x 62"

COMPOSITE

**MEDIA:**

RESIN 7 cu.ft.  
 GRAVEL 150 lbs.

**PIPE SIZE:**

INLET 2"  
 OUTLET 2"  
 DRAIN 1"  
 BRINE 1/2"  
 METER 2"

BRINE TANK

MODEL NO. BT2450R-454HF-5

TANK SIZE: 24" x 50"

POLYETHYLENE

**CAPACITY:**

100 gals.  
 900 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

**WEIGHT (APPROX)**

TOTAL SHIPPING 740 lbs.


**NOTE:**

ALL DASHED PIPE, VALVES,  
 AND FITTINGS NOT PROVIDED  
 BY NELSEN CORPORATION.

**SPACE REQUIRED (APPROX)**


49"L x 24"W x 74"H

PEAK FLOWS ARE NOT  
 RECOMMENDED FOR EXTENDED  
 PERIODS OF TIME.

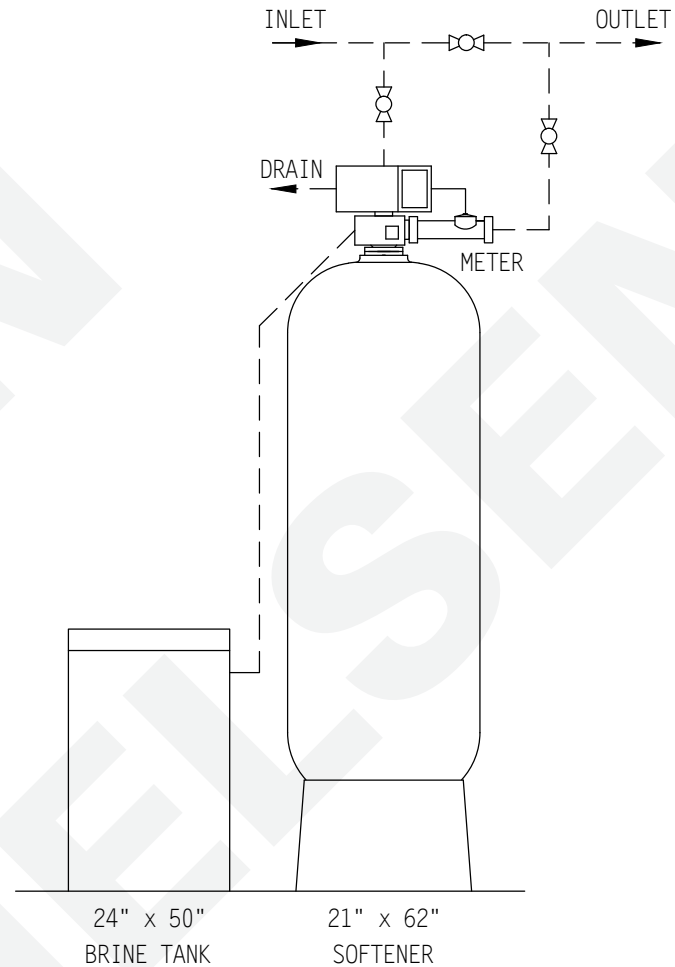

**DO NOT SCALE DRAWING**

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
 CANNOT BE REPRODUCED OR USED TO  
 MANUFACTURE ANYTHING SHOWN OR REFERRED  
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
 NELSEN CORPORATION.

		<b>NELSEN CORPORATION</b> OHIO • ARIZONA • TEXAS • FLORIDA 5151 PORTSIDE DR, MEDINA, OH 44256 800-362-9686 NELSENCORP.COM/COMMERCIAL	
		GENERAL ARRANGEMENT DWG. SOFTENER 210K COMPOSITE TANK SYSTEM 4-METER	
DRAWN BY: RAR	DATE: 03-01-17	DWG. NO. <b>29/17NXT2-210-C2450</b>	
CHECKED BY:	REV:		
PAGE 1 OF 1	REV:		