

# METER SOFTENER

MODEL NO. 29/17NXT2-600-C5060

**CAPACITY:**

MIN. 480,000 grs. @ 10 lbs./cu.ft.  
 MAX. 600,000 grs. @ 15 lbs./cu.ft.

**FLOW RATE:**

NORMAL 100 gpm.  
 PEAK 140 gpm.  
 BACKWASH 35 gpm.

TANK SIZE: 36" x 72"


COMPOSITE

**MEDIA:**

RESIN 20 cu.ft.  
 GRAVEL 500 lbs.

**PIPE SIZE:**

INLET 2"  
 OUTLET 2"  
 DRAIN 1"  
 BRINE 1/2"  
 METER 2"

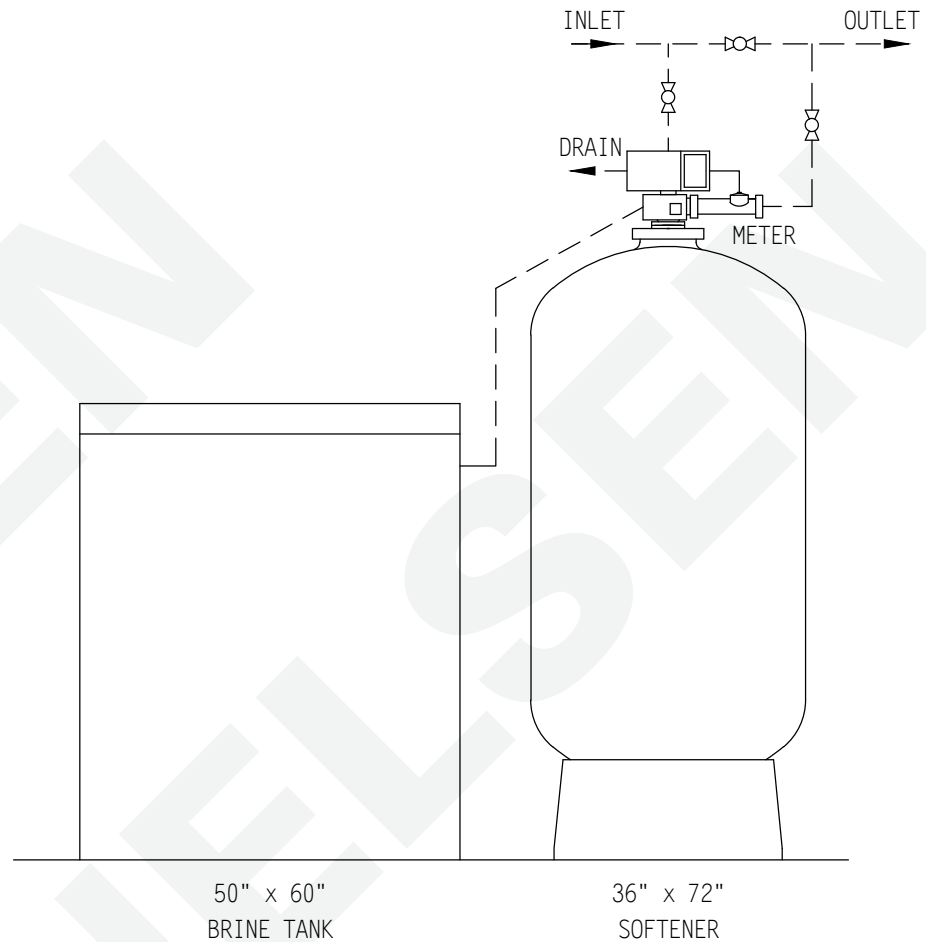

**BRINE TANK**

MODEL NO. BT5060R-454HF-5

TANK SIZE: 50" x 60"

POLYETHYLENE

**CAPACITY:**

500 gals.  
 4500 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

**WEIGHT (APPROX)**

TOTAL SHIPPING 2,115 lbs.

**NOTE:**

ALL DASHED PIPE, VALVES,  
 AND FITTINGS NOT PROVIDED  
 BY NELSEN CORPORATION.


**SPACE REQUIRED (APPROX)**

90"L x 50"W x 95"H

PEAK FLOWS ARE NOT  
 RECOMMENDED FOR EXTENDED  
 PERIODS OF TIME.

**DO NOT SCALE DRAWING**

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
 CANNOT BE REPRODUCED OR USED TO  
 MANUFACTURE ANYTHING SHOWN OR REFERRED  
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
 NELSEN CORPORATION.

		<b>NELSEN CORPORATION</b> OHIO • ARIZONA • TEXAS • FLORIDA 5151 PORTSIDE DR, MEDINA, OH 44256 800-362-9686 NELSENCORP.COM/COMMERCIAL	
		GENERAL ARRANGEMENT DWG. SOFTENER 600K COMPOSITE TANK SYSTEM 4-METER	
DRAWN BY: RAR DATE: 03-01-17 CHECKED BY: PAGE 1 OF 1	REV:	DWG. NO. <b>29/17NXT2-600-C5060</b>	