

# QUADPLEX SOFTENER

MODEL NO. NCSMF-39/18NXT2-QUAD-450-C3948

CAPACITY: (each tank)

MIN. 360,000 grs. @ 10 lbs./cu.ft.

MAX. 450,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)

NORMAL 155 gpm.

PEAK 210 gpm.

BACKWASH 25 gpm.

TANK SIZE: 30" x 72"

COMPOSITE

MEDIA: (each tank)

RESIN 15 cu.ft.

GRAVEL 350 lbs.

PIPE SIZE" PVC

MATERIAL


INLET 3"

OUTLET 3"

DRAIN 2"

BRINE 1"

METER 3"

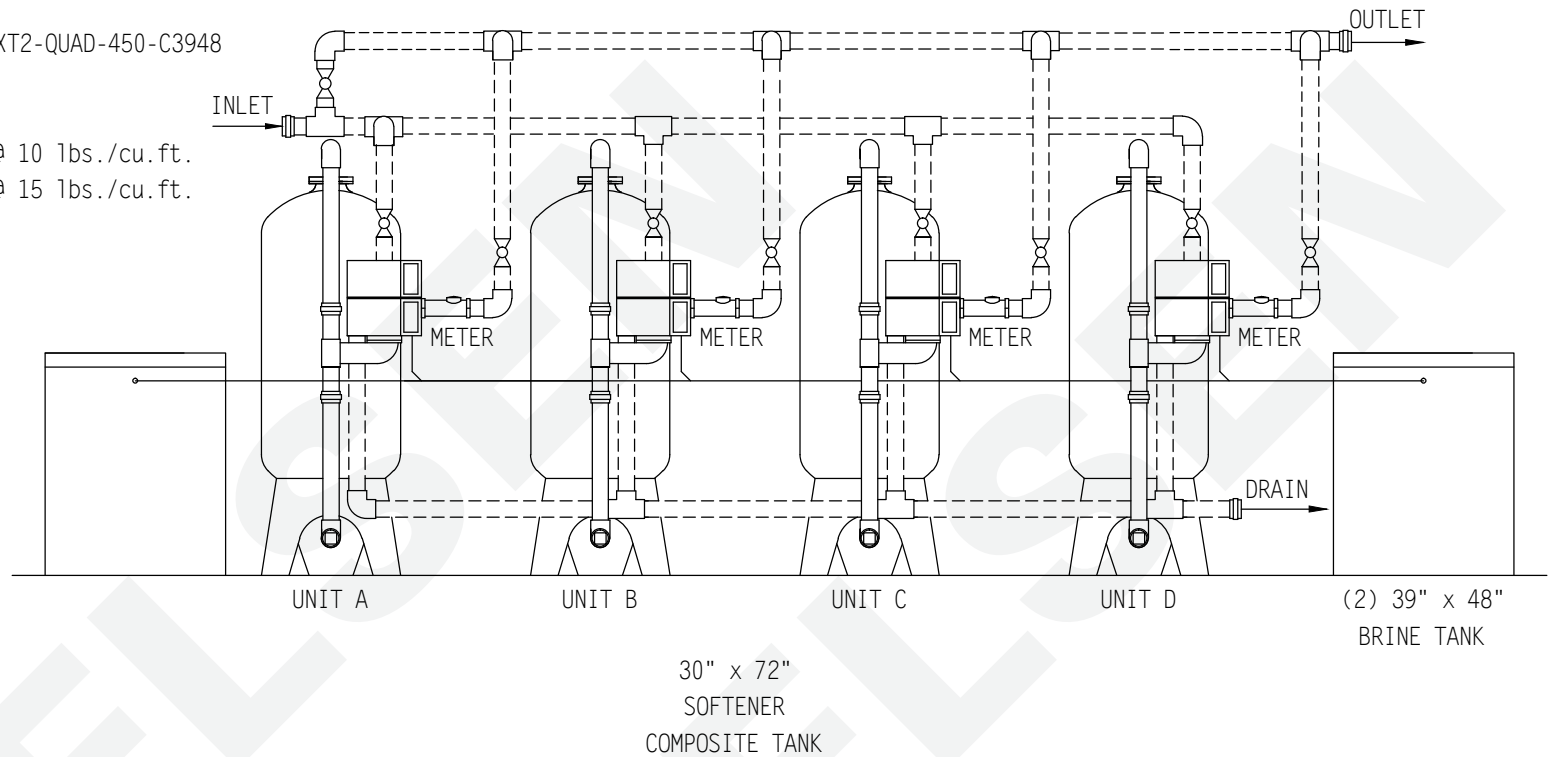

NOTE:

ALL DASHED PIPE, VALVES,  
AND FITTINGS NOT PROVIDED  
BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

214"L x 45"W x 96"H

PEAK FLOWS ARE NOT

RECOMMENDED FOR EXTENDED

PERIODS OF TIME.

## BRINE TANK

MODEL NO. BT3948R-494-5

TANK SIZE: 39" x 48"

POLYETHYLENE

CAPACITY: (each tank)

250 gals.

2,200 lbs./salt

BRINE VALVE: 494

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 6,100 lbs.

DO NOT SCALE DWG.

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
CANNOT BE REPRODUCED OR USED TO  
MANUFACTURE ANYTHING SHOWN OR REFERRED  
TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
NELSEN CORPORATION.

**NELSEN**  
CORPORATION

**NELSEN CORPORATION**  
OHIO • ARIZONA • TEXAS • FLORIDA  
5151 PORTSIDE DRIVE - MEDINA, OH 44256  
800-362-9686  
NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.  
SOFTENER 450K COMPOSITE TANK  
QUADPLEX PROGRESSIVE SYSTEM

DRAWN BY:	RAR
DATE:	02-01-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.  
NCSMF-39/18NXT2-QUAD-450-C3948