

# QUADPLEX SOFTENER

MODEL NO. NCSMF-39/18NXT2-QUAD-900-C5060


CAPACITY: (each tank)  
 MIN. 720,000 grs. @ 10 lbs./cu.ft.  
 MAX. 900,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)  
 NORMAL 300 gpm.  
 PEAK 400 gpm.  
 BACKWASH 50 gpm.

TANK SIZE: 42" x 72"  
 COMPOSITE

MEDIA: (each tank)  
 RESIN 30 cu.ft.  
 GRAVEL 700 lbs.

PIPE SIZE" PVC  
 MATERIAL  
 INLET 3"  
 OUTLET 3"  
 DRAIN 2"  
 BRINE 1"  
 METER 3"

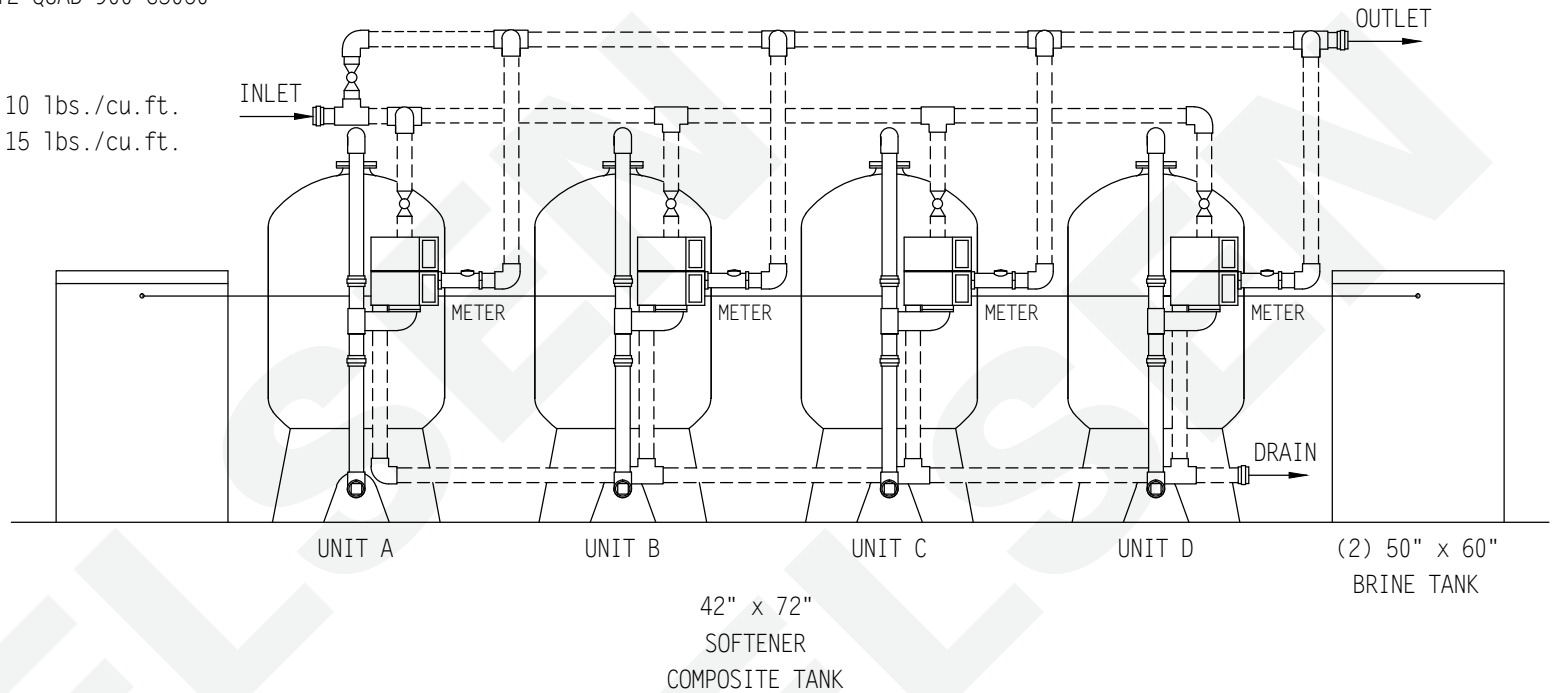

NOTE:  
 ALL DASHED PIPE, VALVES,  
 AND FITTINGS NOT PROVIDED  
 BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)  
 284"L x 57"W x 101"H

PEAK FLOWS ARE NOT  
 RECOMMENDED FOR EXTENDED  
 PERIODS OF TIME.

BRINE TANK  
 MODEL NO. BT5060R-494-5

TANK SIZE: 50" x 60"  
 POLYETHYLENE  
 CAPACITY: (each tank)  
 500 gals.  
 4,500 lbs./salt

BRINE VALVE: 494  
 BRINE WELL: 5"  
 WEIGHT (APPROX)

TOTAL SHIPPING 11,400 lbs.

**DO NOT SCALE DWG.**

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
 CANNOT BE REPRODUCED OR USED TO  
 MANUFACTURE ANYTHING SHOWN OR REFERRED  
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
 NELSEN CORPORATION.

**NELSEN**  
 CORPORATION

**NELSEN CORPORATION**  
 OHIO • ARIZONA • TEXAS • FLORIDA  
 5151 PORTSIDE DRIVE - MEDINA, OH 44256  
 800-362-9686  
 NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.  
 SOFTENER 900K COMPOSITE TANK  
 QUADPLEX PROGRESSIVE SYSTEM

DRAWN BY:	RAR
DATE:	02-01-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.  
 NCSMF-39/18NXT2-QUAD-900-C5060