

# TWIN ALTERNATING SOFTENER

MODEL NO. NCSMF-39/18NXT2-TA-1200-C5060

CAPACITY: (each tank)

MIN. 960,000 grs. @ 10 lbs./cu.ft.

MAX. 1,200,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)

NORMAL 205 gpm.

PEAK 280 gpm.

BACKWASH 60 gpm.

TANK SIZE: 48" x 72"

COMPOSITE

MEDIA: (each tank)

RESIN 40 cu.ft.

GRAVEL 900 lbs.

PIPE SIZE"

MATERIAL PVC


INLET 3"

OUTLET 3"

DRAIN 2"

BRINE 1"

METER 3"

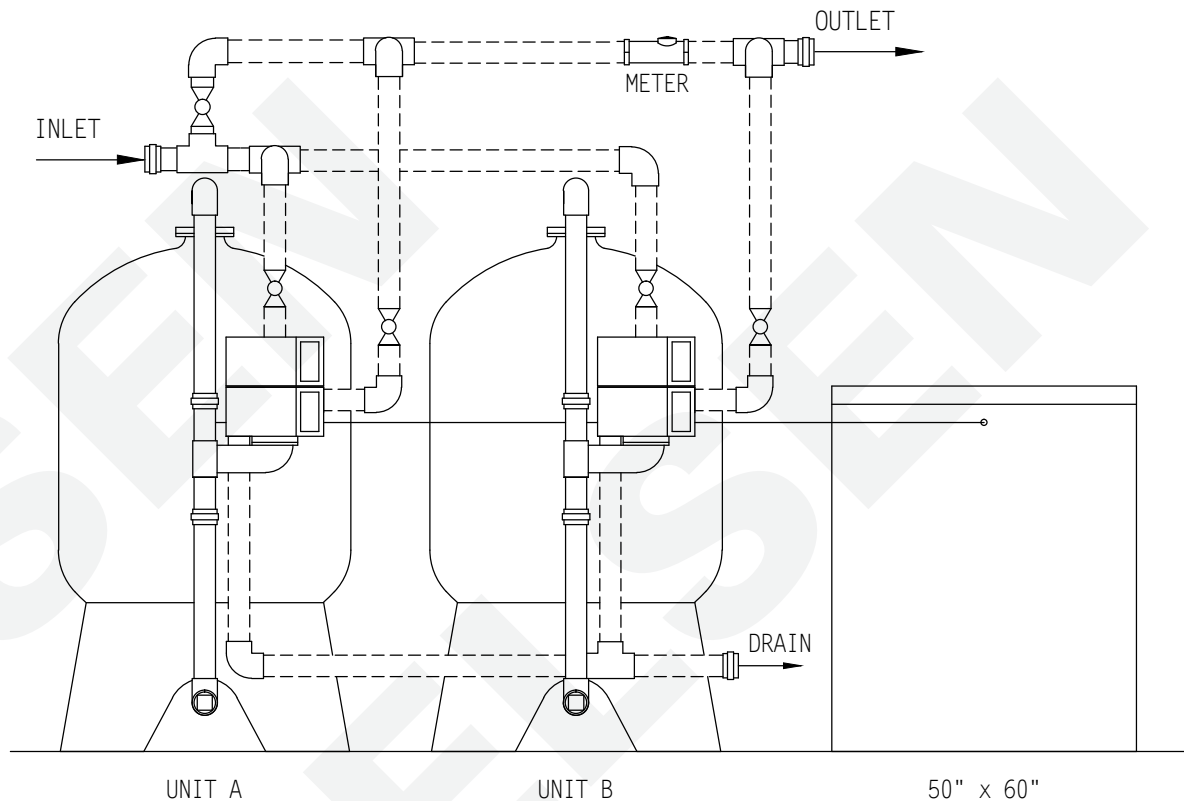

NOTE:

ALL DASHED PIPE, VALVES, AND FITTINGS NOT PROVIDED BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

208"L x 63"W x 106"H

PEAK FLOWS ARE NOT

RECOMMENDED FOR EXTENDED

PERIODS OF TIME.

## BRINE TANK

MODEL NO. BT5060R-494-5

TANK SIZE: 50" x 60"

POLYETHYLENE

CAPACITY:

500 gals.

4,500 lbs./salt

BRINE VALVE: 494

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 8,650 lbs.

48" x 72"  
SOFTENER  
COMPOSITE TANK

50" x 60"  
BRINE TANK

**NELSEN**  
CORPORATION

**NELSEN CORPORATION**  
OHIO • ARIZONA • TEXAS • FLORIDA  
5151 PORTSIDE DRIVE - MEDINA, OH 44256  
800-362-9686  
NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.  
SOFTENER 1200K COMPOSITE TANK  
SYSTEM 7-ALTERNATING

DO NOT SCALE DWG.

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM NELSEN CORPORATION.

DRAWN BY:	RAR
DATE:	01-30-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.  
NCSMF-39/18NXT2-TA-1200-C5060