

TRIPLEX SOFTENER

MODEL NO. NCSMF-39/18NXT2-TRI-450-C3948

CAPACITY: (each tank)
 MIN. 360,000 grs. @ 10 lbs./cu.ft.
 MAX. 450,000 grs. @ 15 lbs./cu.ft.


FLOW RATE: (each tank)
 NORMAL 155 gpm.
 PEAK 210 gpm.
 BACKWASH 25 gpm.

TANK SIZE: 30" x 72"
 COMPOSITE

MEDIA: (each tank)
 RESIN 15 cu.ft.
 GRAVEL 350 lbs.

PIPE SIZE" PVC
 MATERIAL

INLET 3"
 OUTLET 3"
 DRAIN 2"
 BRINE 1"
 METER 3"

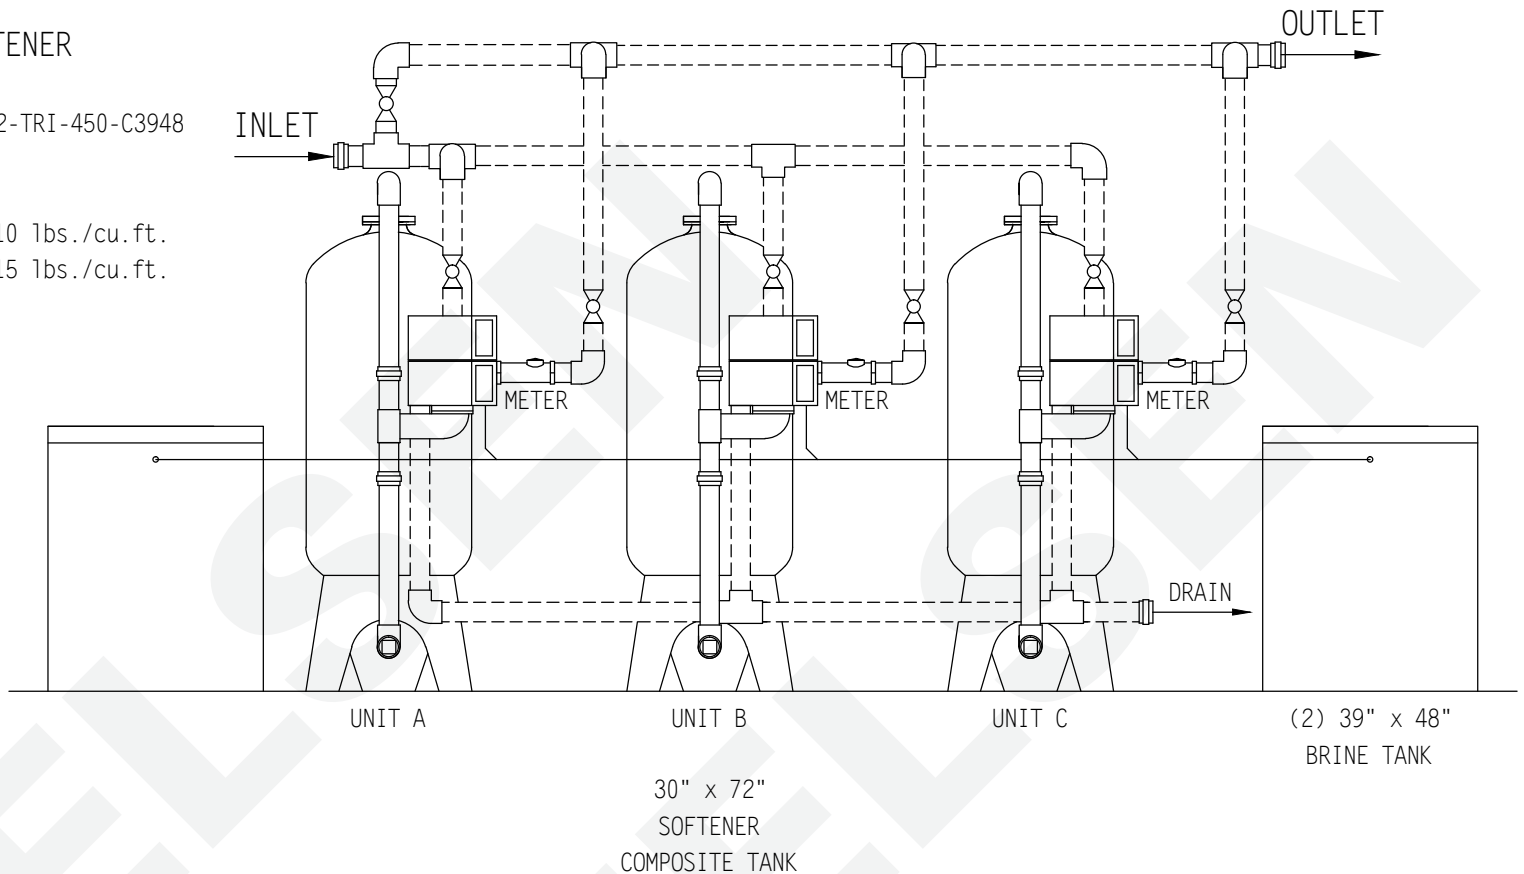

NOTE:
 ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)
 182"L x 45"W x 96"H

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

BRINE TANK
 MODEL NO. BT3948R-494-5

TANK SIZE: 39" x 48"
 POLYETHYLENE

CAPACITY: (each tank)
 250 gals.
 2,200 lbs./salt

BRINE VALVE: 494

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 4,600 lbs.

DO NOT SCALE DWG.

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 NELSEN CORPORATION.

NELSEN
 CORPORATION

NELSEN CORPORATION
 OHIO • ARIZONA • TEXAS • FLORIDA
 5151 PORTSIDE DRIVE - MEDINA, OH 44256
 800-362-9686
 NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.
 SOFTENER 450K COMPOSITE TANK
 TRIPLEX PROGRESSIVE SYSTEM

DRAWN BY:	RAR
DATE:	01-31-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.
NCSMF-39/18NXT2-TRI-450-C3948