

# TRIPLEX SOFTENER

MODEL NO. MNCSMF-39/18NXT2-TRI-600-C5060

CAPACITY: (each tank)

MIN. 480,000 grs. @ 10 lbs./cu.ft.

MAX. 600,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)

NORMAL 185 gpm.

PEAK 250 gpm.

BACKWASH 35 gpm.

TANK SIZE: 36" x 72"

COMPOSITE

MEDIA: (each tank)

RESIN 20 cu.ft.

GRAVEL 500 lbs.

PIPE SIZE"

MATERIAL


INLET 3"

OUTLET 3"

DRAIN 2"

BRINE 1"

METER 3"

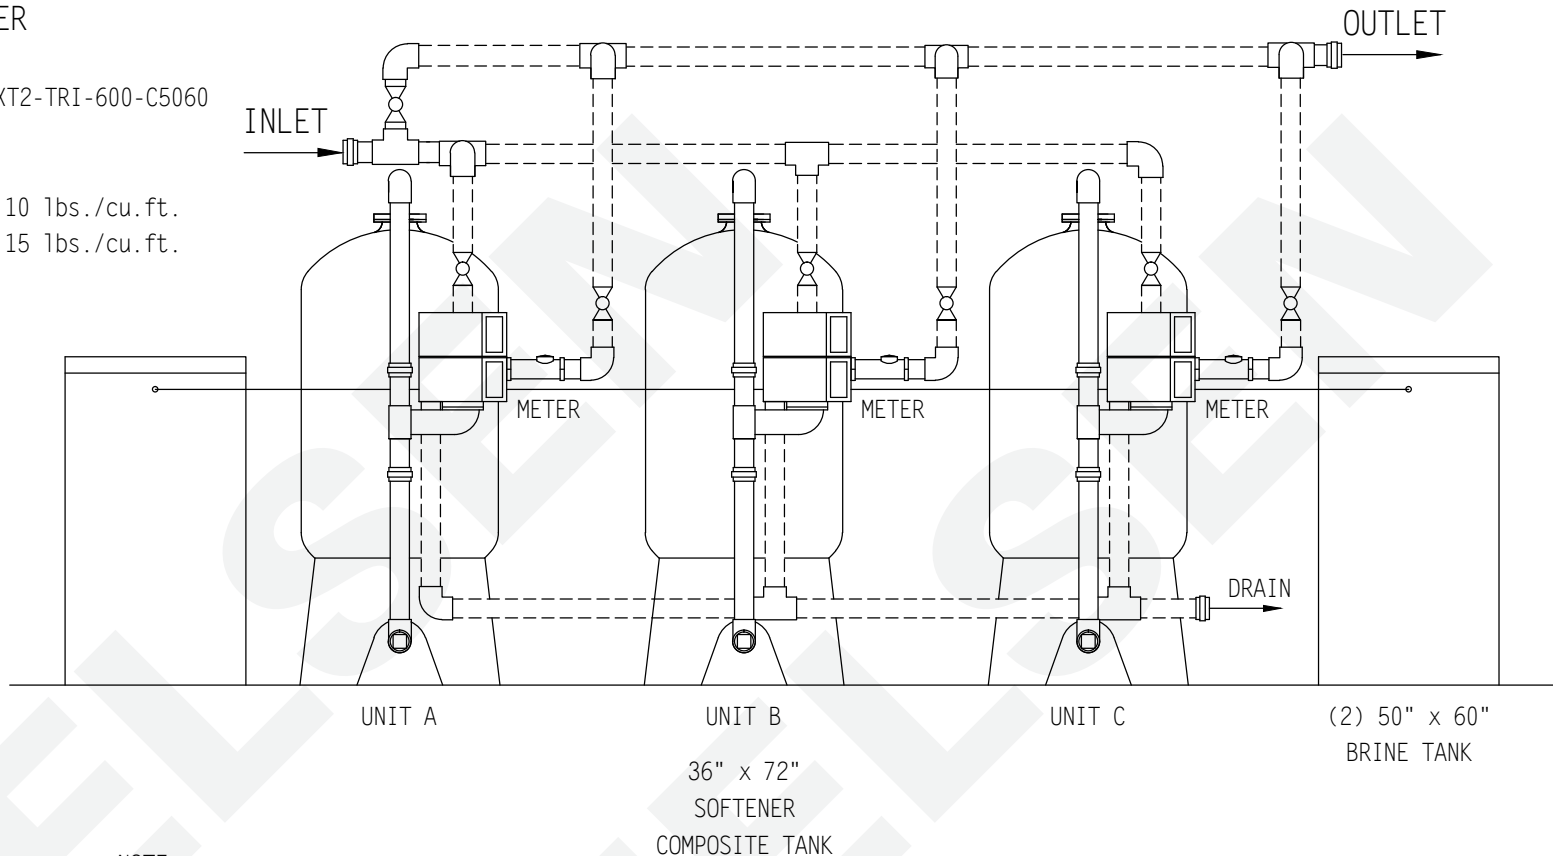

NOTE:

ALL DASHED PIPE, VALVES,  
AND FITTINGS NOT PROVIDED  
BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

222"L x 51"W x 98"H

PEAK FLOWS ARE NOT

RECOMMENDED FOR EXTENDED

PERIODS OF TIME.

## BRINE TANK

MODEL NO. BT5060R-494-5

TANK SIZE: 50" x 60"

POLYETHYLENE

CAPACITY: (each tank)

500 gals.

4,500 lbs./salt

BRINE VALVE: 494

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 6,100 lbs.

**DO NOT SCALE DWG.**

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
CANNOT BE REPRODUCED OR USED TO  
MANUFACTURE ANYTHING SHOWN OR REFERRED  
TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
NELSEN CORPORATION.

**NELSEN**  
CORPORATION

**NELSEN CORPORATION**  
OHIO • ARIZONA • TEXAS • FLORIDA  
5151 PORTSIDE DRIVE - MEDINA, OH 44256  
800-362-9686  
NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.  
SOFTENER 600K COMPOSITE TANK  
TRIPLEX PROGRESSIVE SYSTEM

DRAWN BY:	RAR
DATE:	01-31-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.  
NCSMF-39/18NXT2-TRI-600-C5060