

TRIPLEX METER SOFTENER

MODEL NO. NCSMF-WS2H-TRI-210-C2450

CAPACITY: (each tank)

MIN. 168,000 grs. @ 10 lbs./cu.ft.
 MAX. 210,000 grs. @ 15 lbs./cu.ft.

FLOW RATE: (each tank)

NORMAL 66 gpm.
 PEAK 85 gpm.
 BACKWASH 12 gpm.

TANK SIZE: 21" x 62"


COMPOSITE

MEDIA: (each tank)

RESIN 7 cu.ft.
 GRAVEL 150 lbs.

PIPE SIZE:

INLET 2"
 OUTLET 2"
 DRAIN 1"
 BRINE 1/2"
 METER 2"

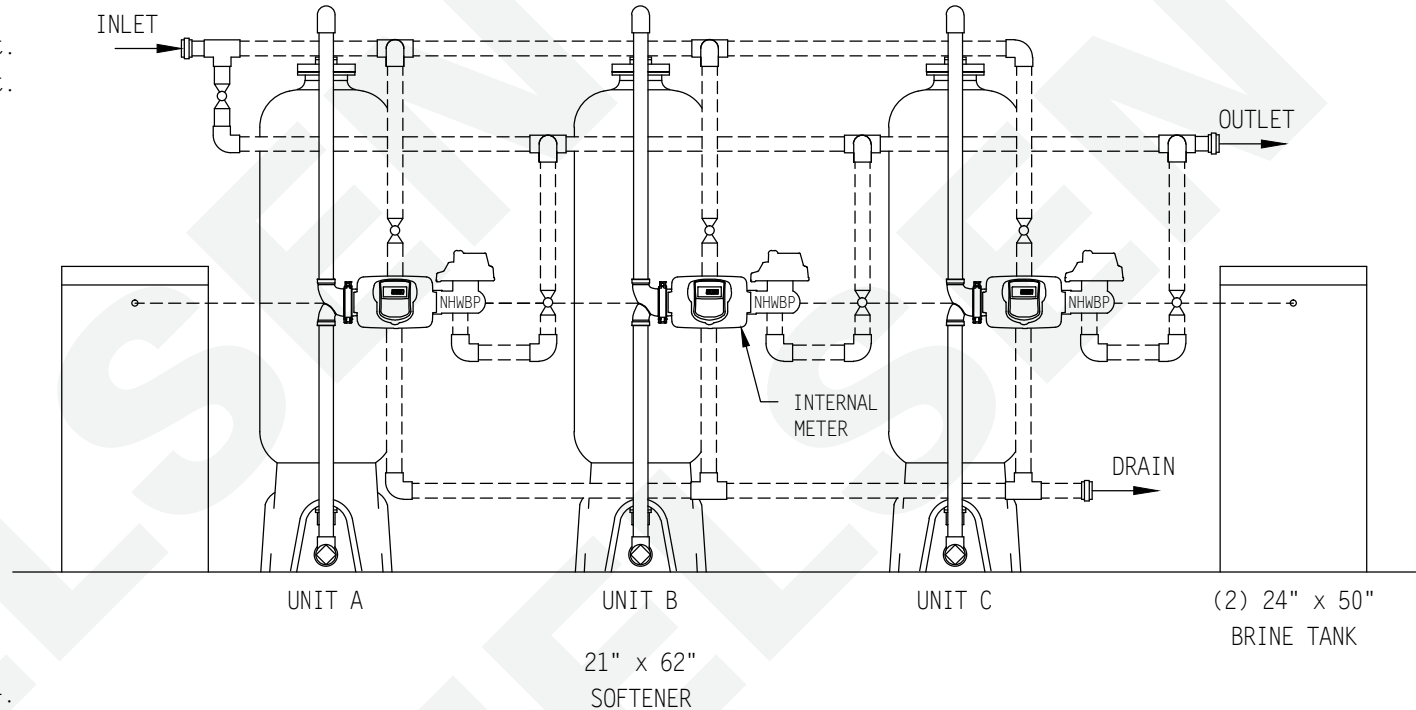

BRINE TANK

MODEL NO. BT2450R-454HF-5

TANK SIZE: 24"x 50"

POLYETHYLENE

CAPACITY: (each tank)

100 gals.
 900 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 2,070 lbs.

NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY NELSEN CORPORATION.

SPACE REQUIRED (APPROX)

127"L x 24"W x 85"H

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 NELSEN CORPORATION.

NELSEN
 CORPORATION

NELSEN CORPORATION
 OHIO • ARIZONA • TEXAS • FLORIDA
 3250 BARBER RD - NORTON, OH 44203
 800-362-9686
 NELSENCORP.COM/COMMERCIAL

GENERAL ARRANGEMENT DWG.
 SOFTENER 210K COMPOSITE TANK
 TRIPLEX METER SYSTEM

DRAWN BY:	RAR
DATE:	04-06-17
CHECKED BY:	
PAGE 1 OF 1	REV:

DWG. NO.
 NCSMF-WS2H-TRI-210-C2450